

Optical Cavity Tests of Lorentz Invariance

Yuta Michimura

Department of Physics, University of Tokyo



H. Takeda, Y. Sakai, N. Matsumoto, M. Ando

Abstract

- compared the speed of light propagating in opposite directions
- using a double-pass optical ring cavity
- put **most stringent limits**

$$\left| \frac{\delta c}{c} \right| \lesssim 6 \times 10^{-15}$$


- put **new limits** on higher order Lorentz violation
- **upgrade** of apparatus underway

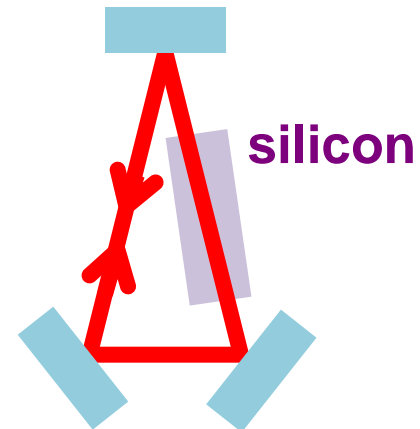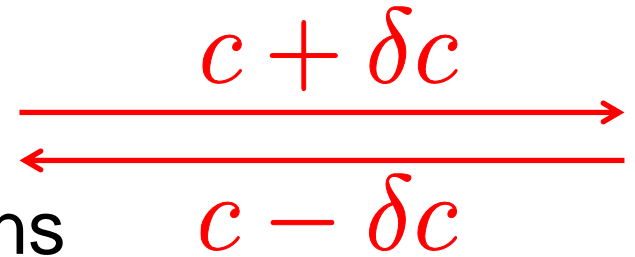

Y. Michimura *et al.*: [Phys. Rev. Lett. 110, 200401 \(2013\)](#)

Y. Michimura *et al.*: [Phys. Rev. D 88, 111101\(R\) \(2013\)](#)

Y. Michimura *et al.*: [arXiv:1602.00391](#)


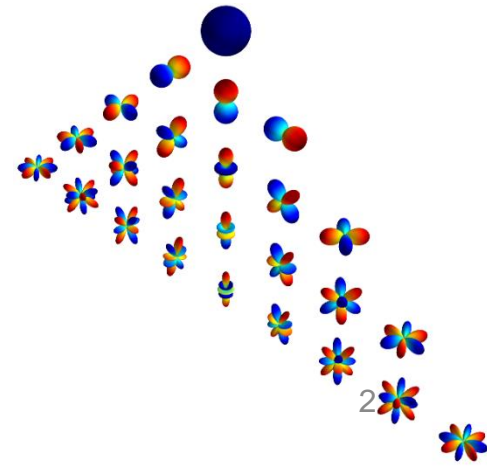


SR and Lorentz violation


- Special Relativity (1905)
speed of light is constant
- Lorentz invariance in electrodynamics
- no one could find any violation
- but...
 - quantum gravity suggests violation at some level
e.g. $\delta c/c \sim 10^{-17}$

D. Colladay and V. Alan Kostelecký: PRD 58 (1998) 116002

- anisotropy in CMB
possible preferred frame?
→ motivation for testing SR

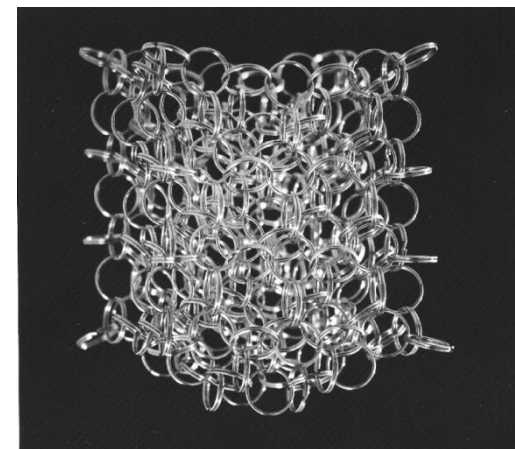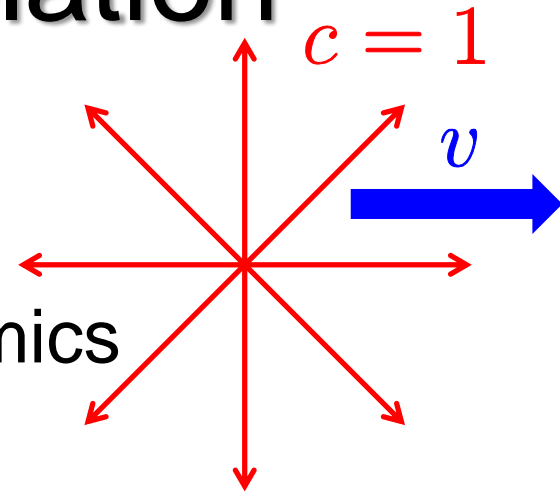

http://www.cpt.univ-mrs.fr/~rovelli/loop_quantum_gravity.jpg

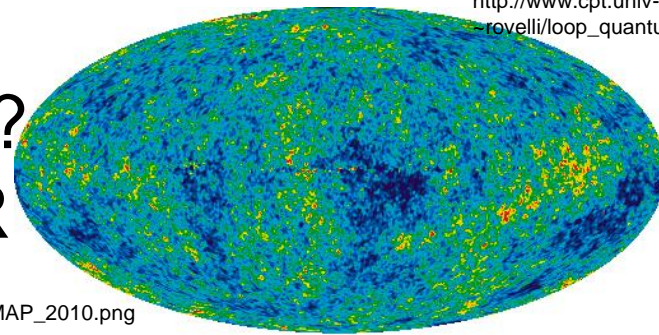


http://en.wikipedia.org/wiki/File:WMAP_2010.png


Test of Special Relativity

- test of constancy of speed of light
- two types of test: even-parity and odd-parity

odd-parity test
(Ives-Stilwell type test)

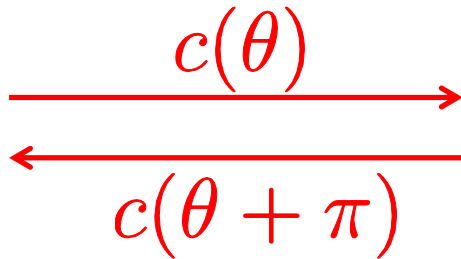


even-parity test
(Michelson-Morley type test)

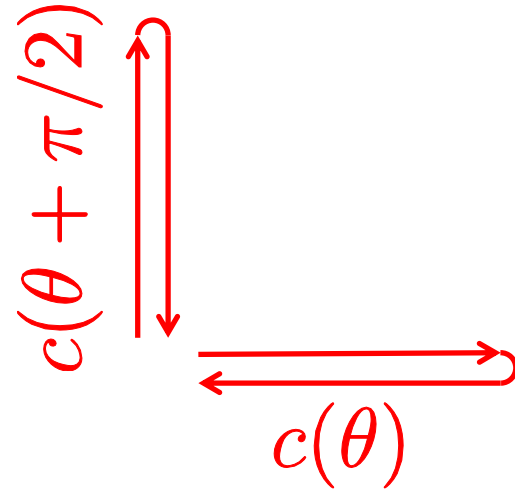


Anisotropy in the Speed of Light

- can be expanded with spherical harmonics
- multipole anisotropy comes from higher order Lorentz violation

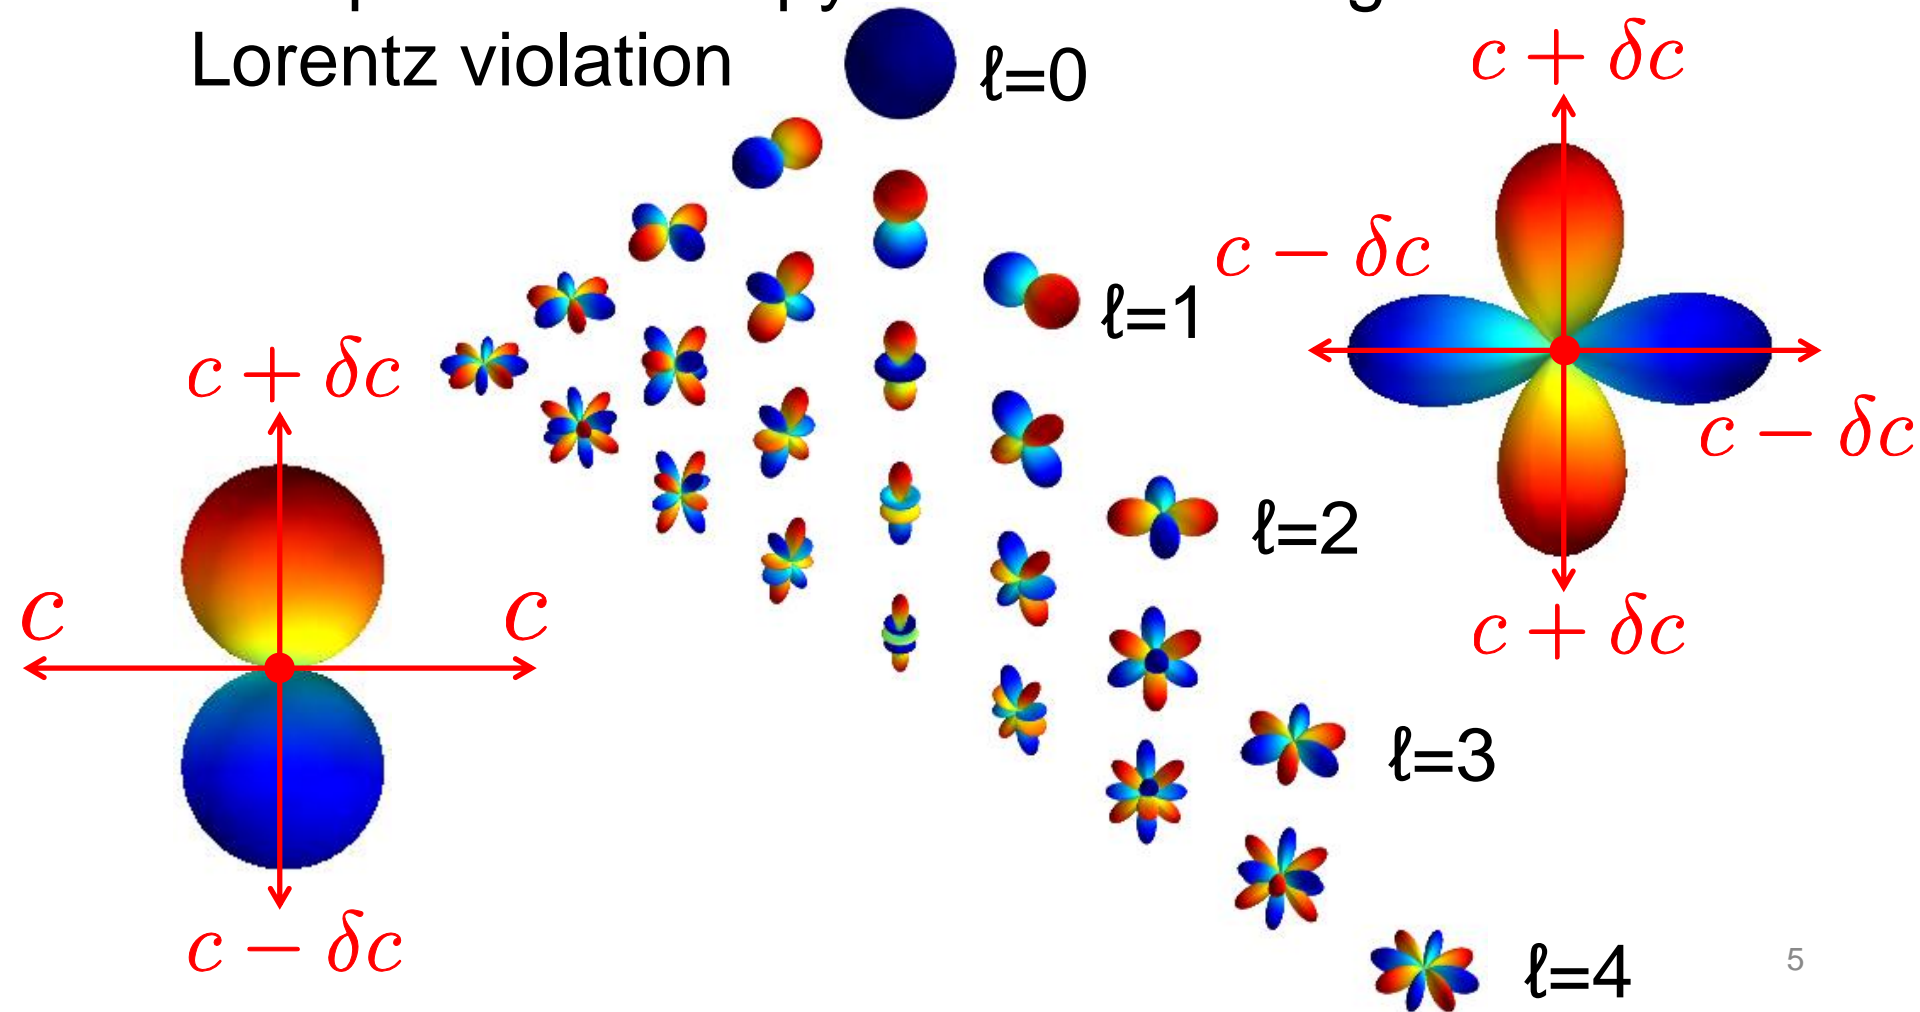


Previous Limits

- $l = \text{even}$ limits with even-parity experiments
- $l = \text{odd}$ limits with odd-parity experiments

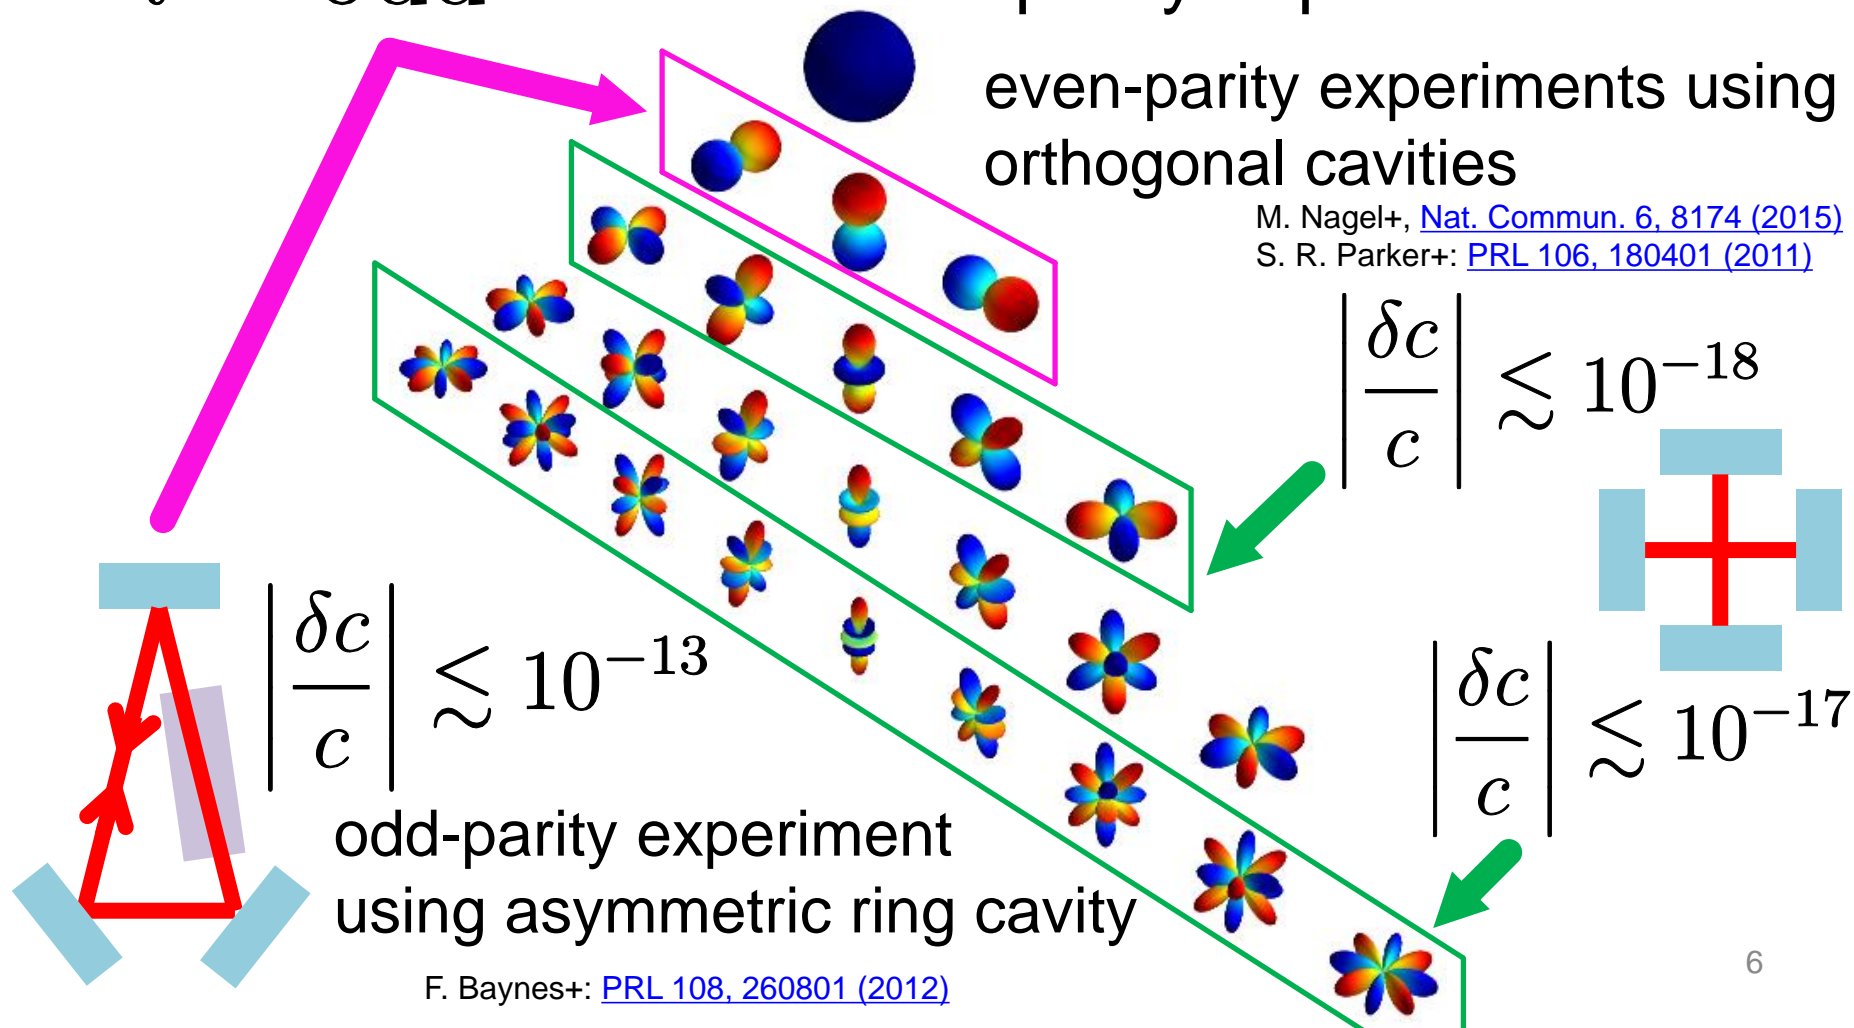


Our Limits

- improved limits on $l = 1$ (dipole) anisotropy
- new limits on $l = 3$ (hexapole) anisotropy

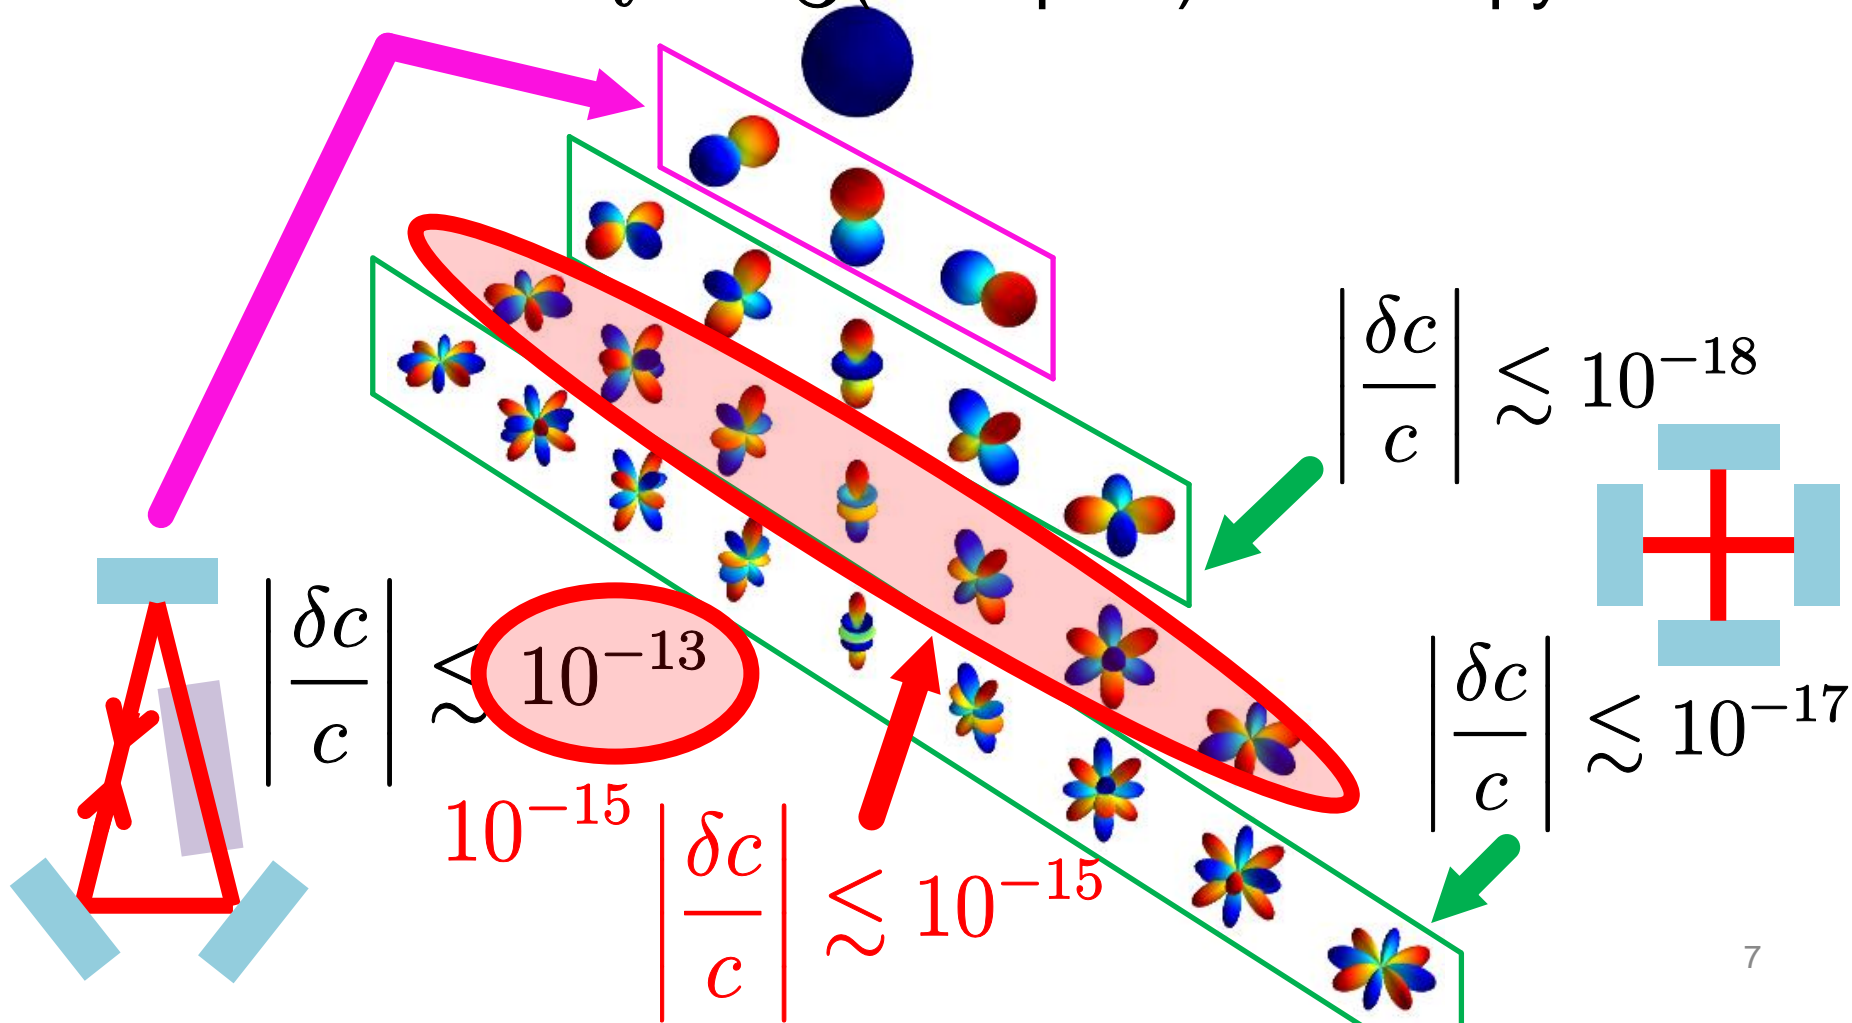

Optical Ring Cavity

- sensitive to LV when a dielectric is contained

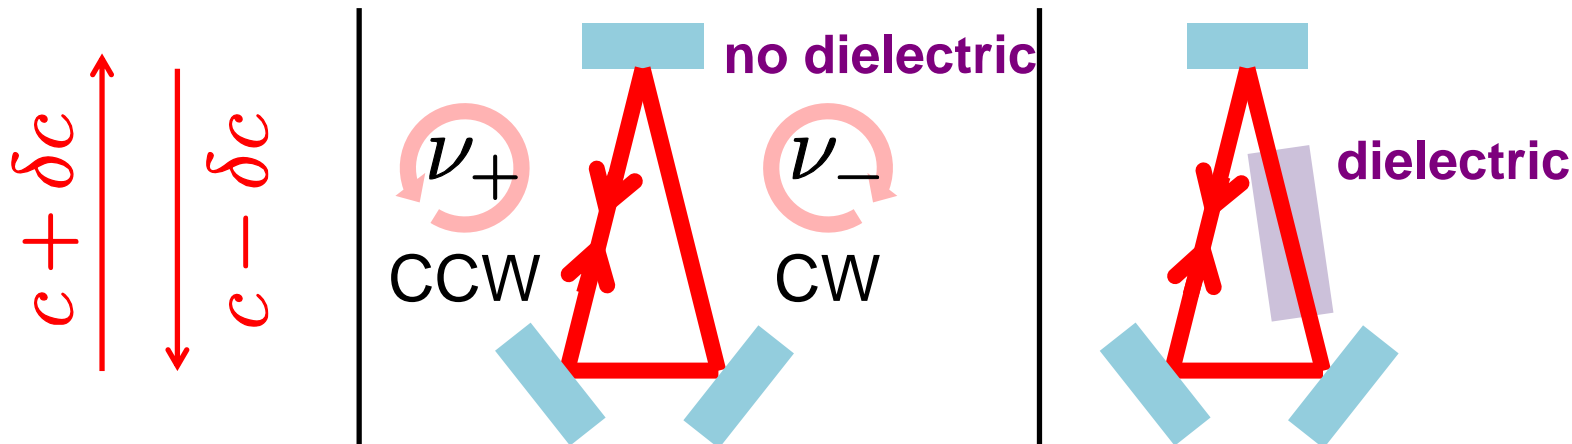


no LV	$\nu_+ = \nu_0$ $\nu_- = \nu_0$	$\nu_+ = \nu$ $\nu_- = \nu$	<div style="border: 1px solid red; padding: 5px; display: inline-block;"> freq. shift \propto LV </div>
LV	$\nu_+ = \nu_0$ $\nu_- = \nu_0$	$\nu_+ = \nu - \delta\nu$ $\nu_- = \nu + \delta\nu$	

- $\nu_+ - \nu_-$ gives LV signal (null measurement)


How Do We Measure 1/4

- inject laser beam in CCW

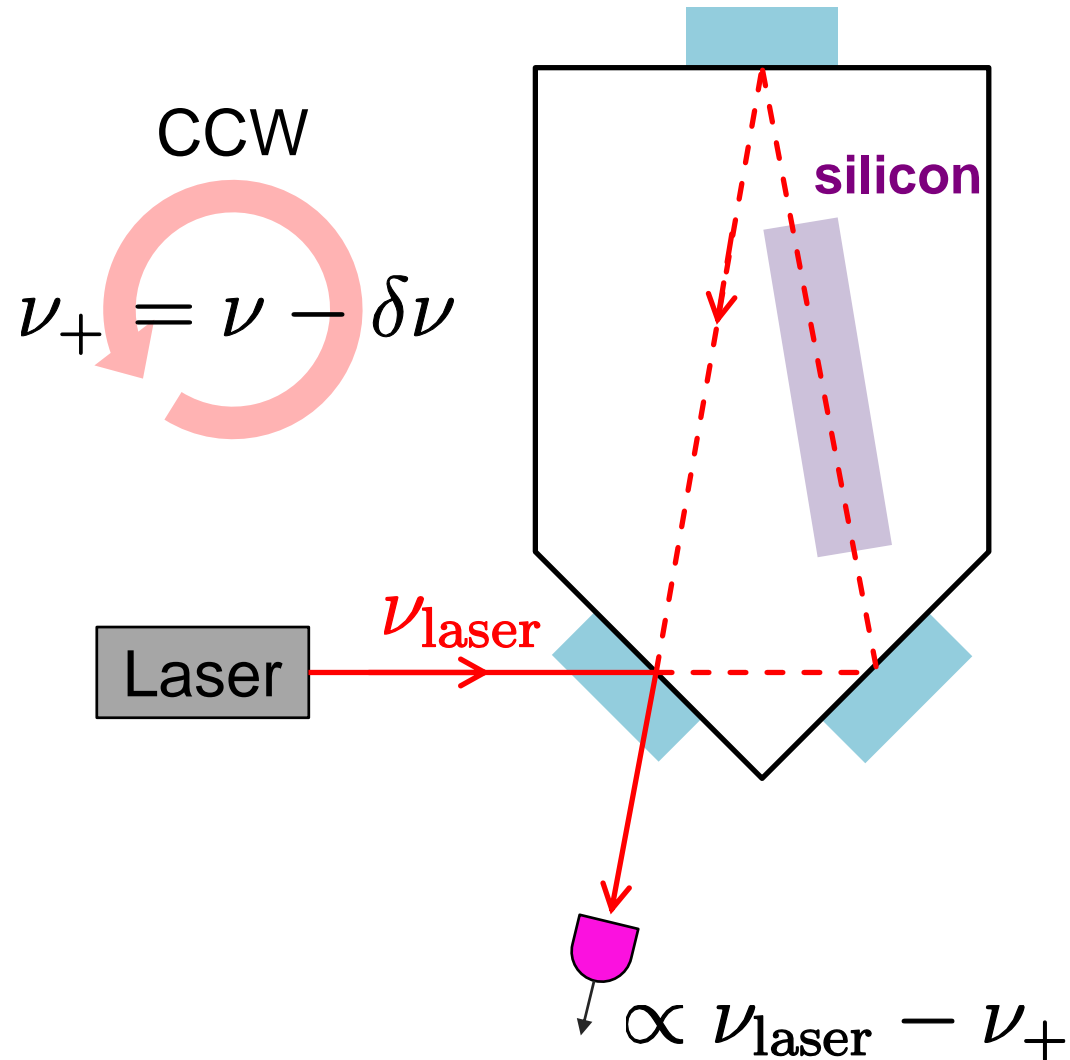


How Do We Measure 2/4

- lock laser frequency to CCW resonance (ν_+)

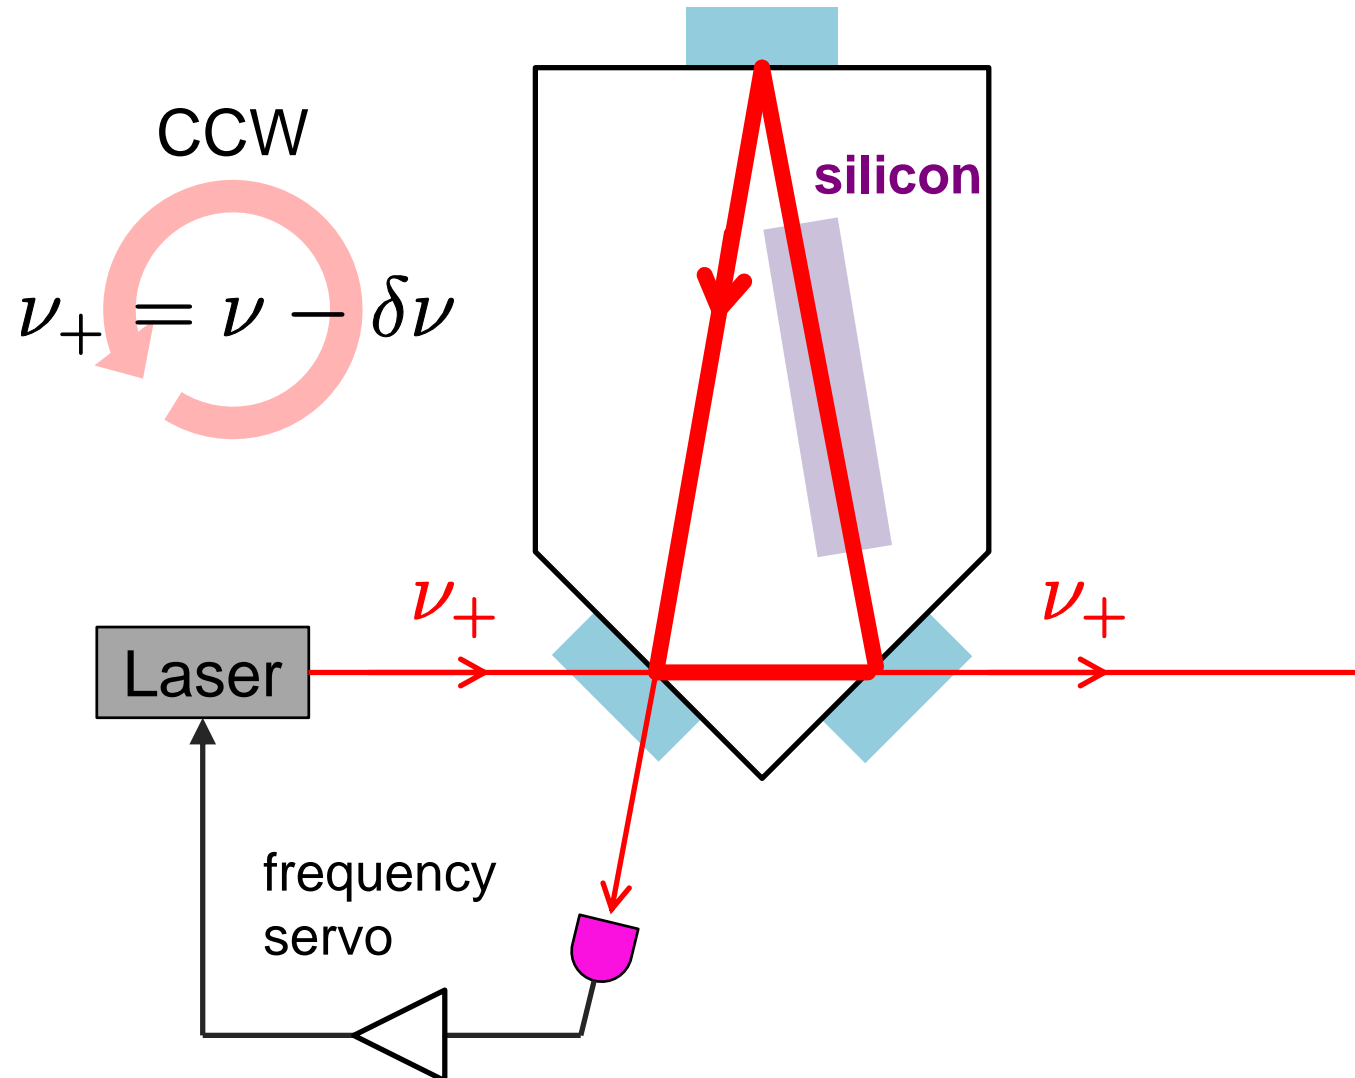


How Do We Measure 3/4

- reflect the beam back into the cavity in CW

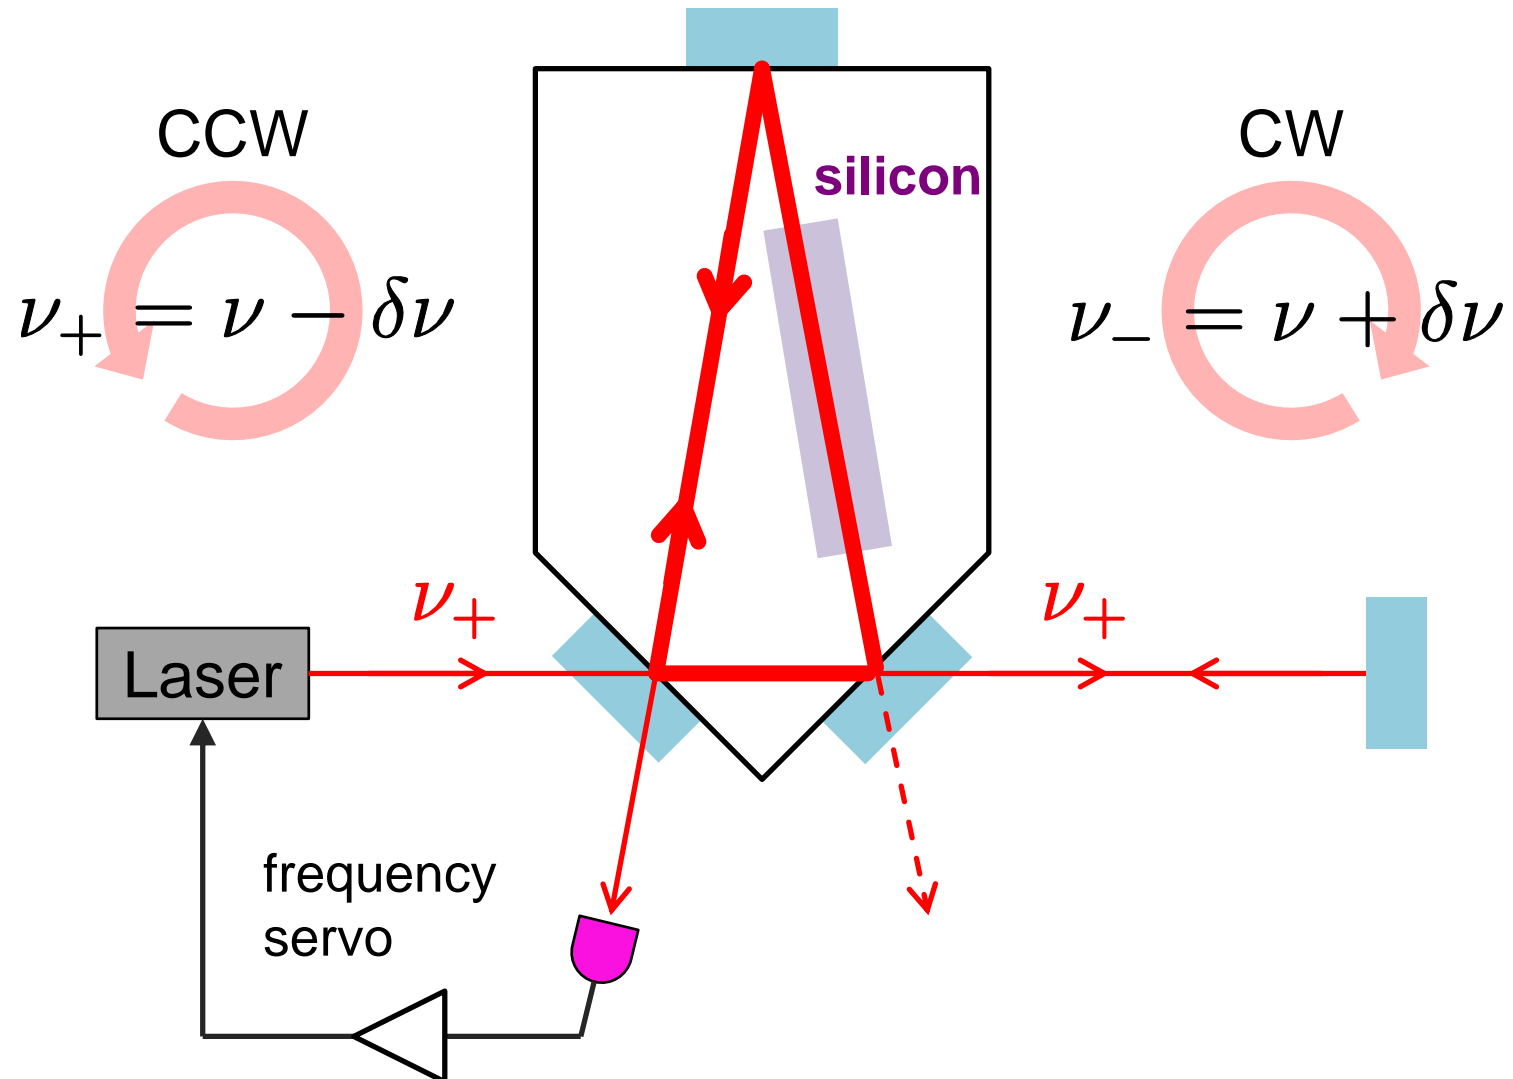

How Do We Measure 4/4

- LV signal obtained from cavity reflection (null measurement)

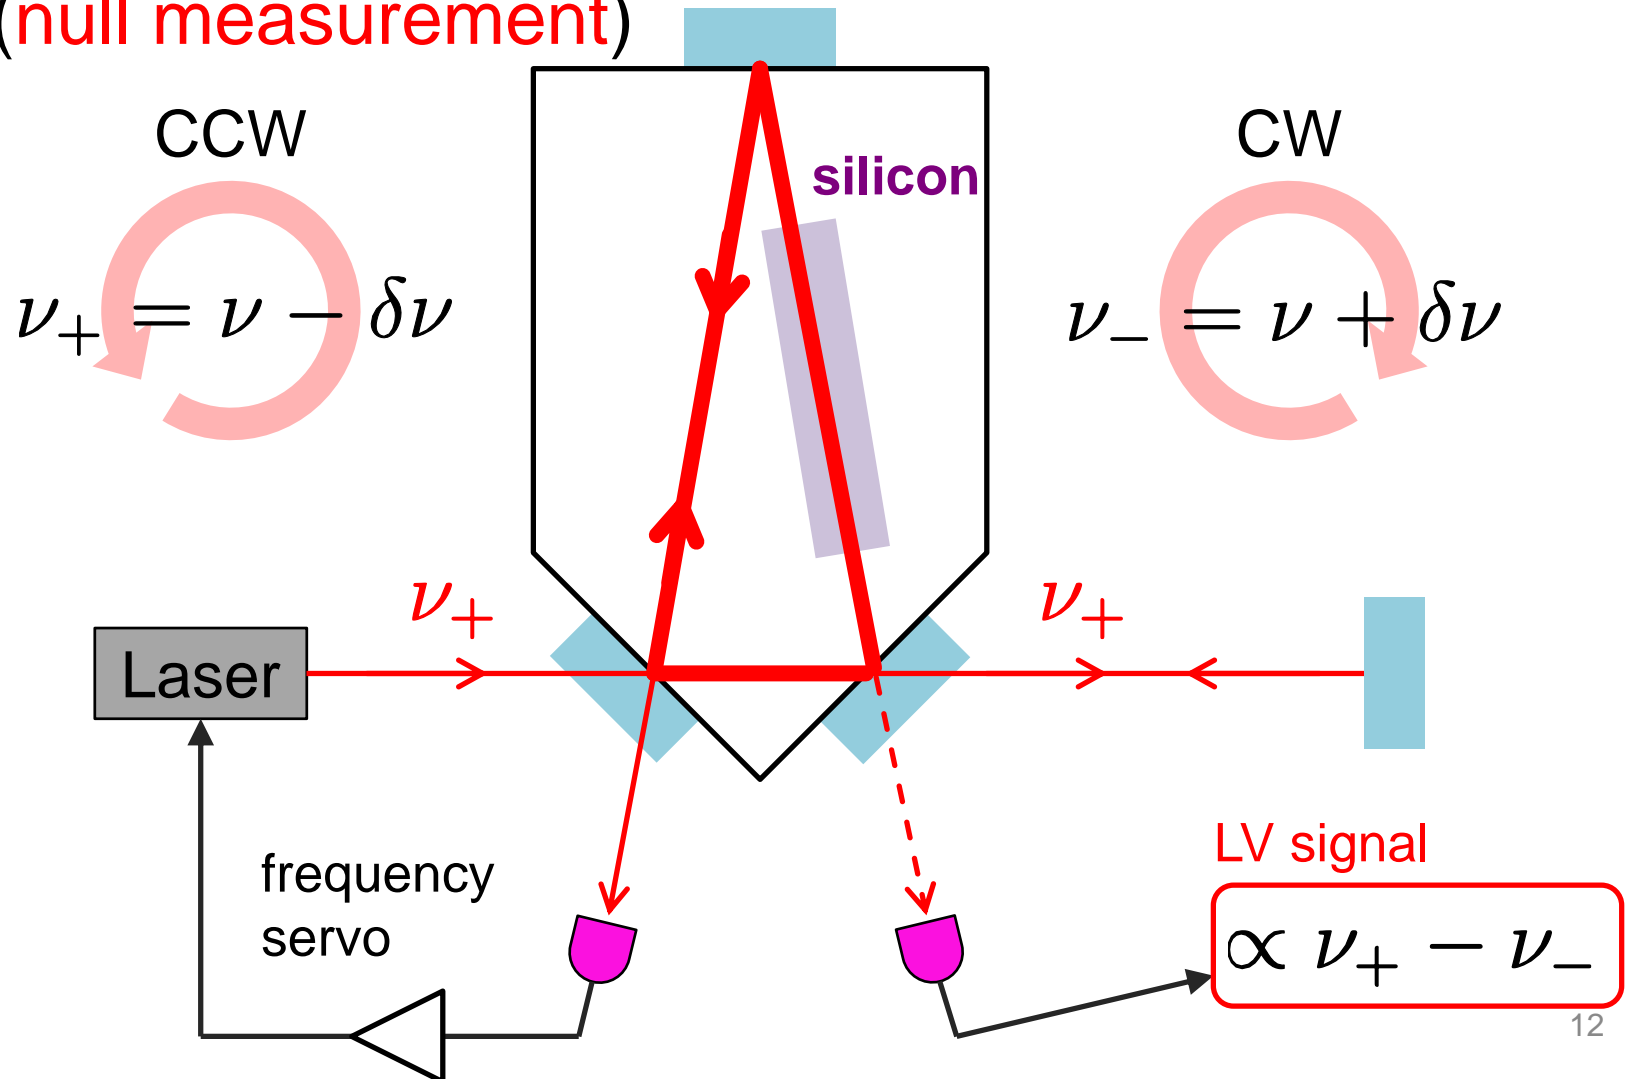

Experimental Setup

- frequency comparison using double-pass setup
- rotate and modulate LV signal

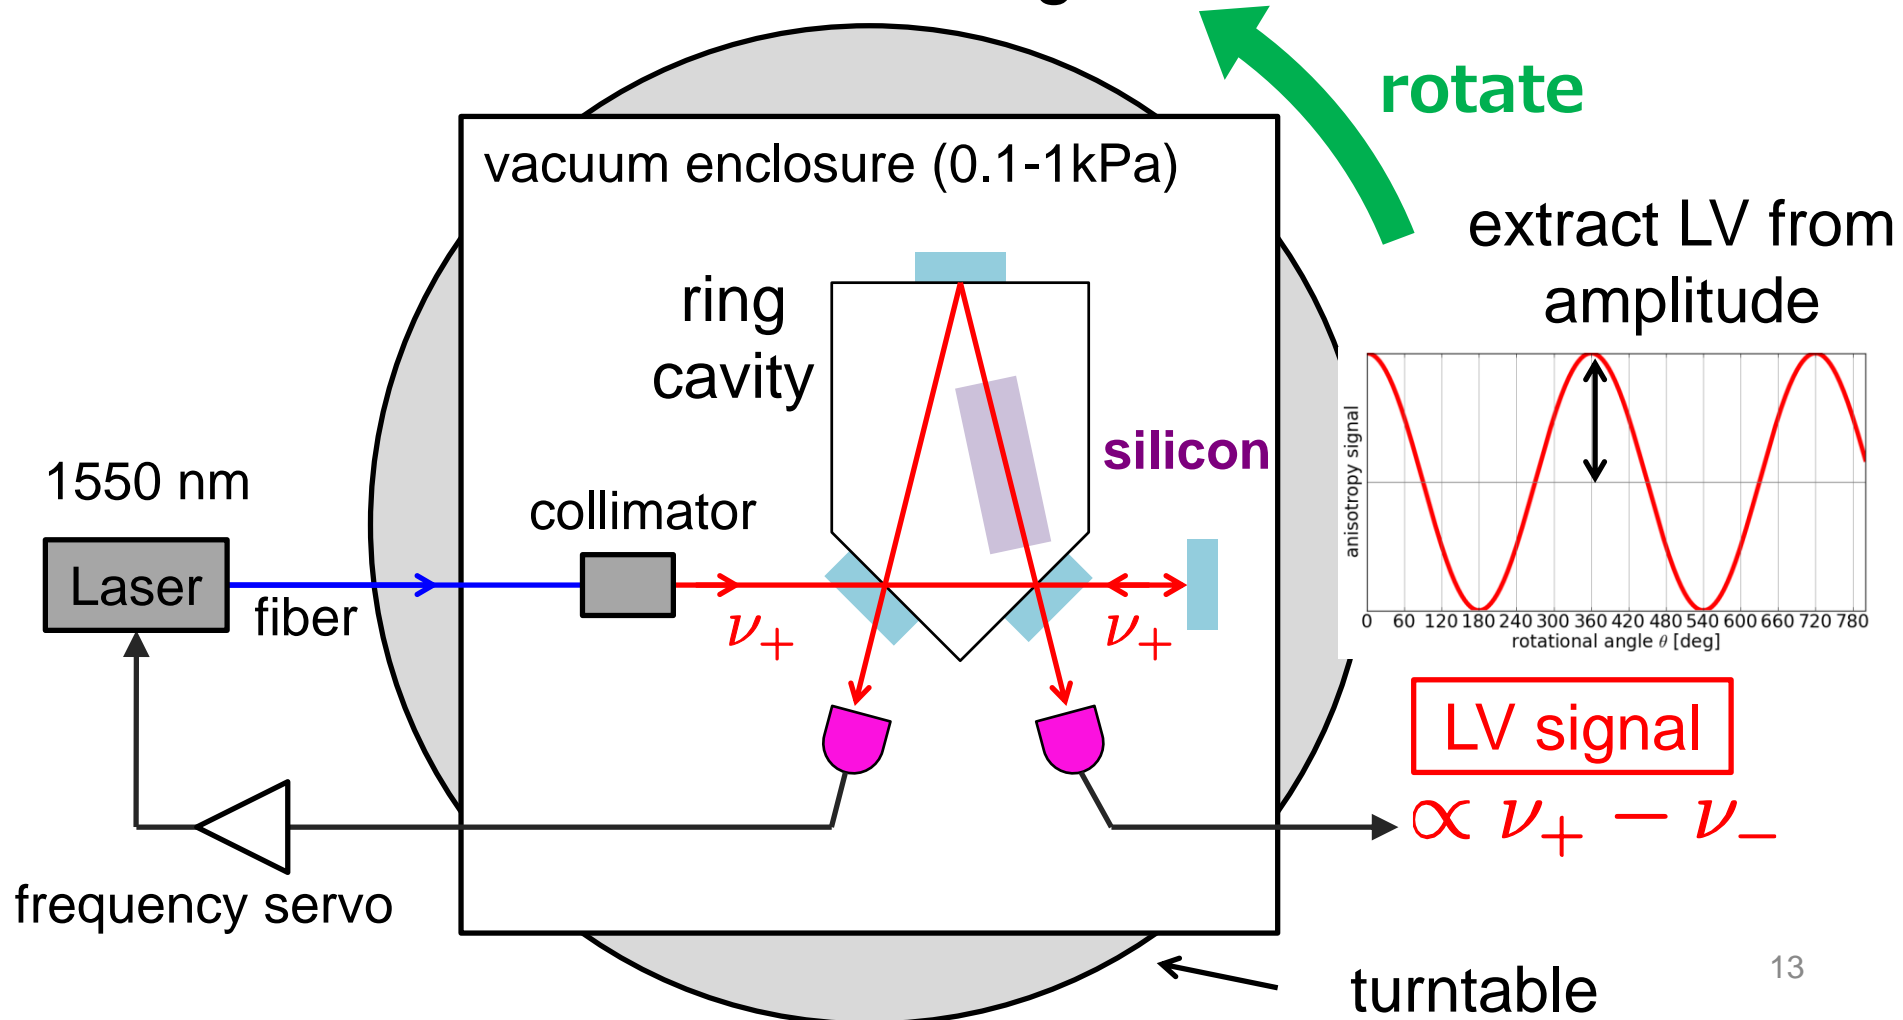


Photo of the Optics

Inside vacuum enclosure
(30cm × 30cm × 17cm)

ring
cavity

collimator

PDs1

PDp1

PDp2

PDs2

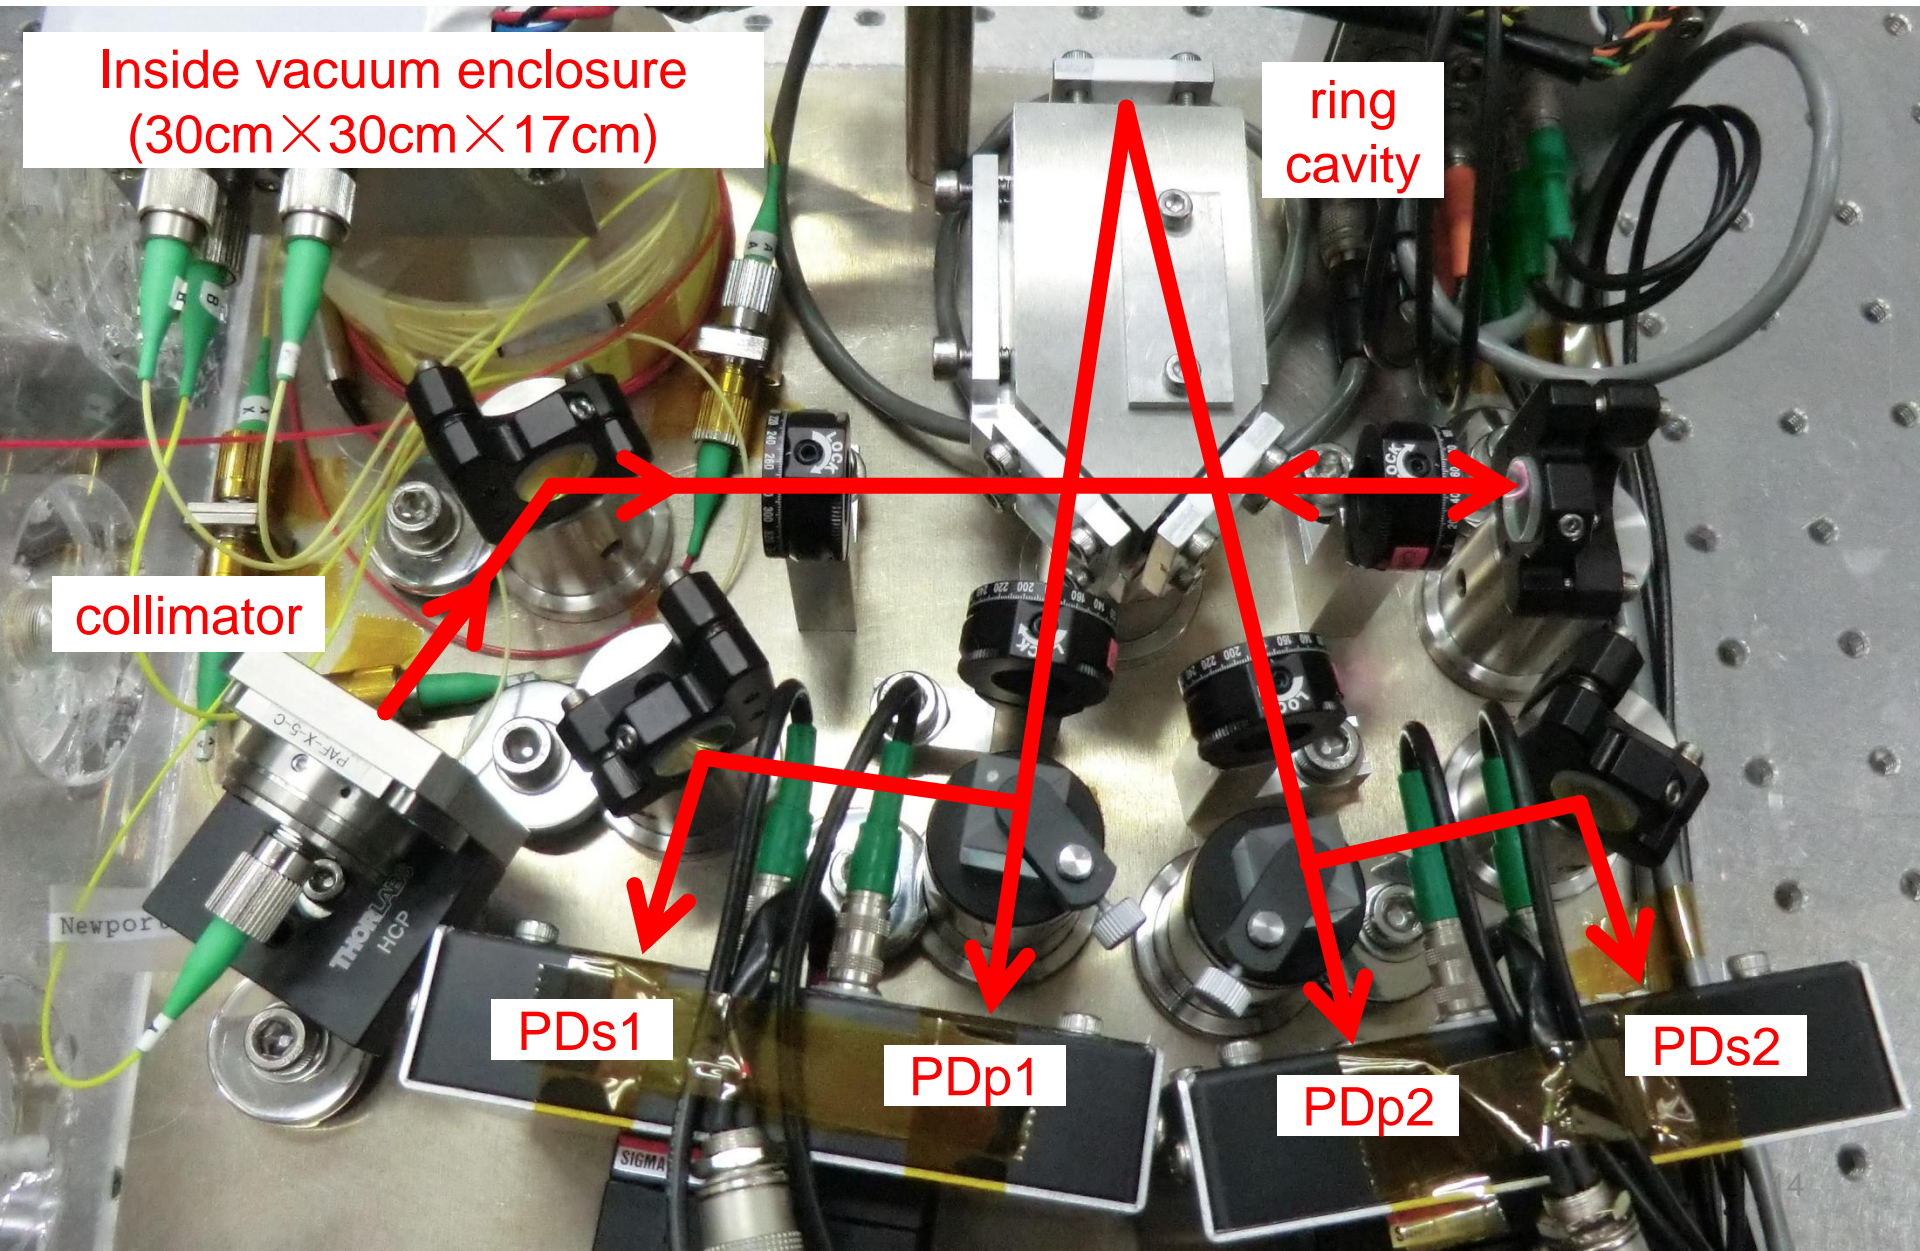



Photo of the Whole Setup

electrical cables

laser source

vacuum enclosure
+ shielding
(optics inside)

turntable

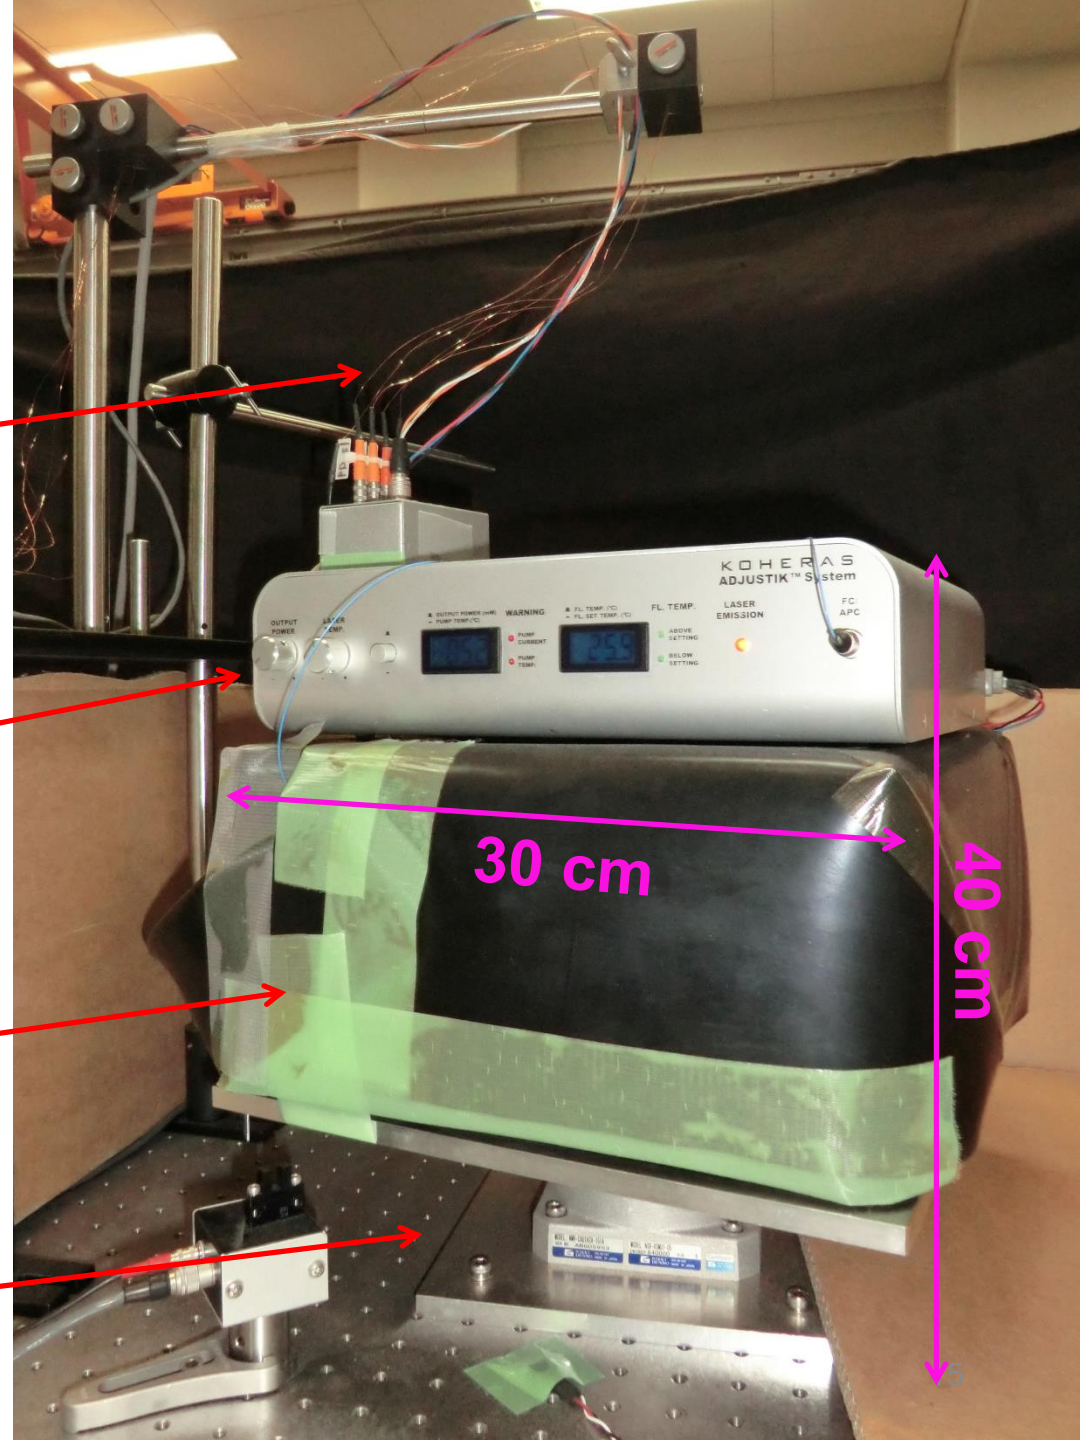


Rotation

- 12 sec / rotation, alternately




Observation Data

- from July 2012 to October 2013
- 393 days, 1.67 million rotations
- duty cycle: 53% (64% after Oct 2012)

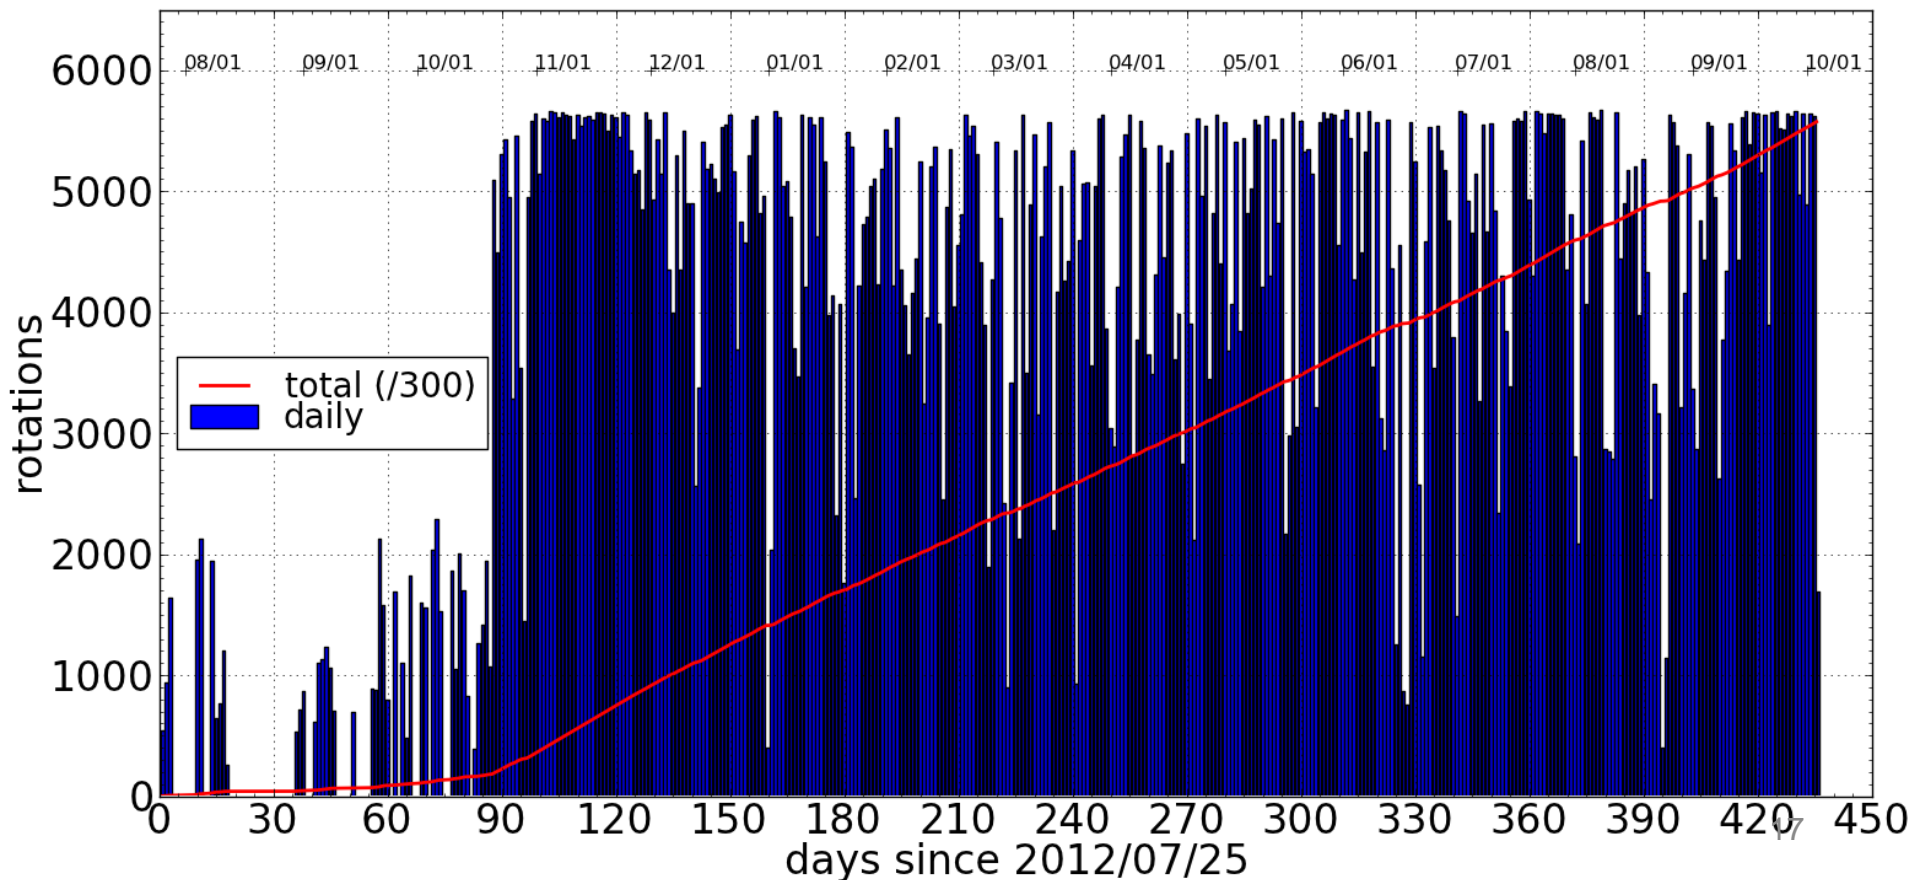




Data Analysis 1/3

- demodulate each 1 rotation data with ω_{rot}

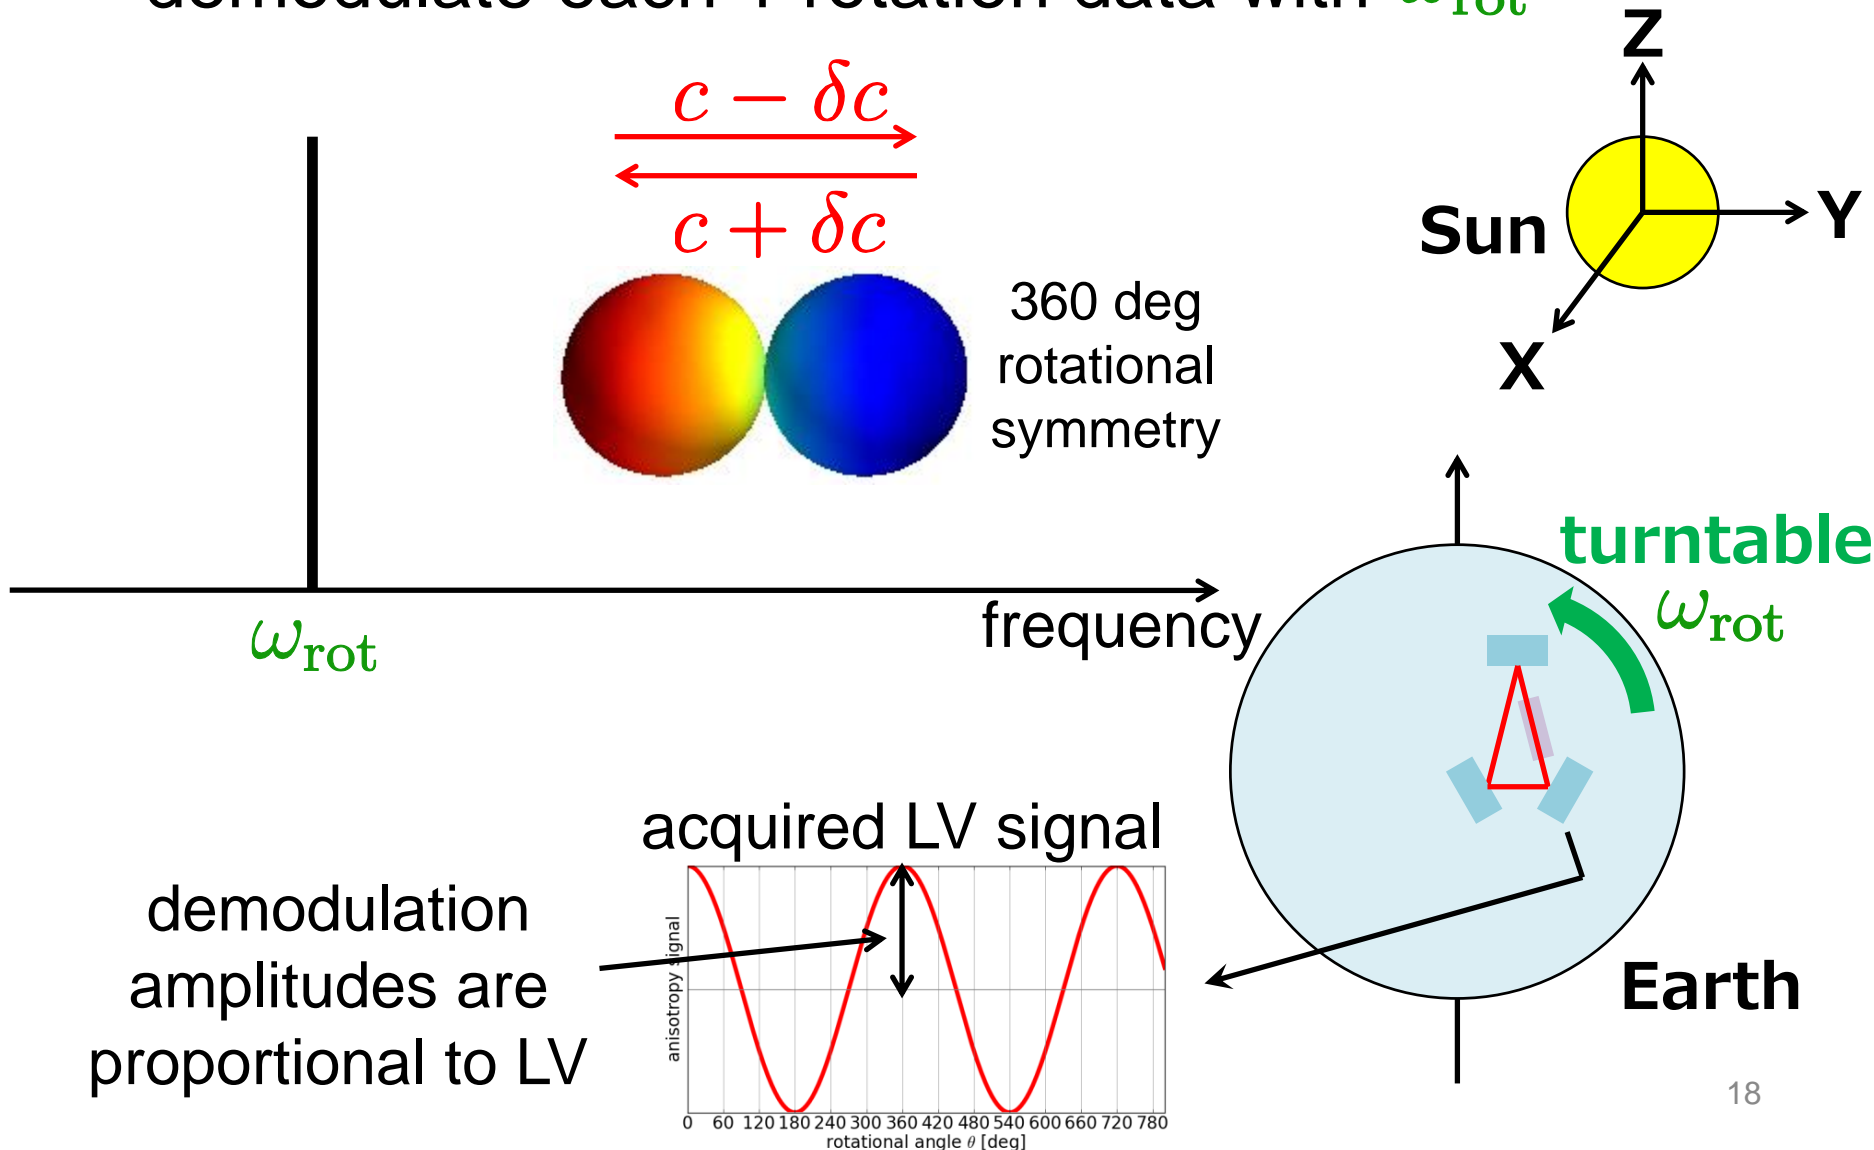


Data Analysis 2/3

- next, demodulate 1 day data with ω_{\oplus}

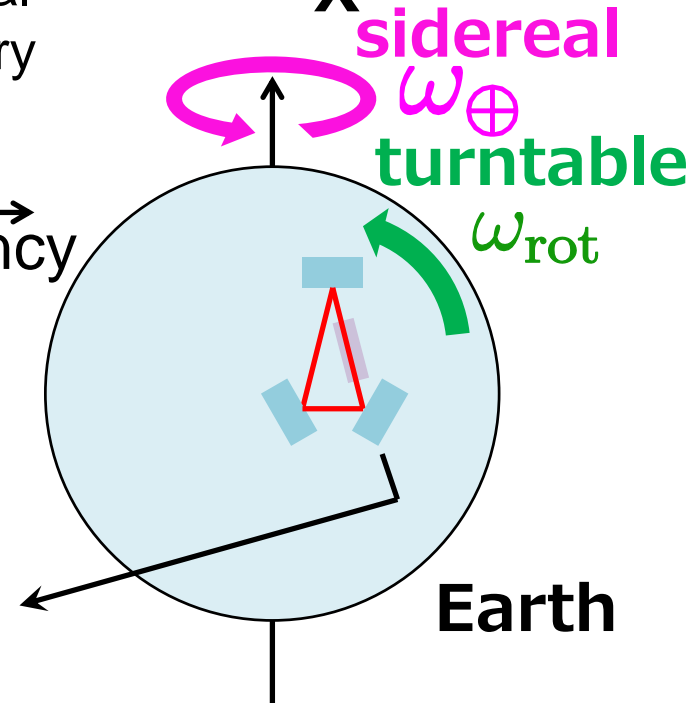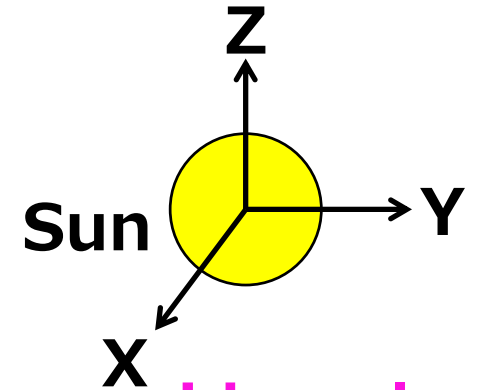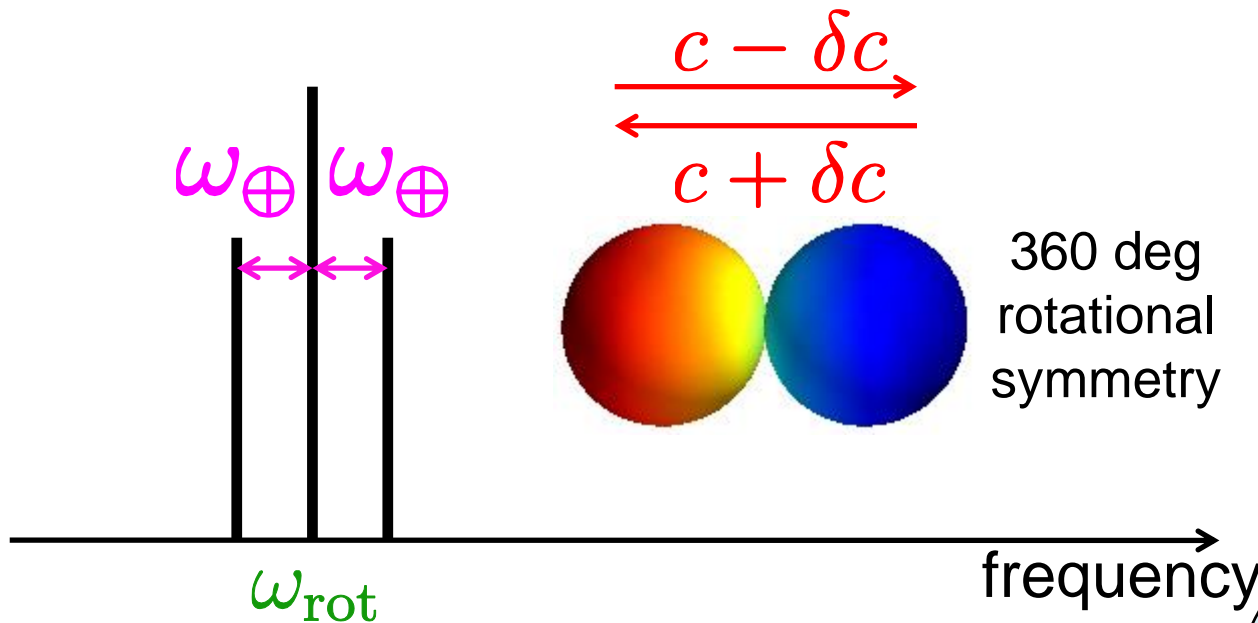


demodulation amplitudes are modulated by sidereal frequency

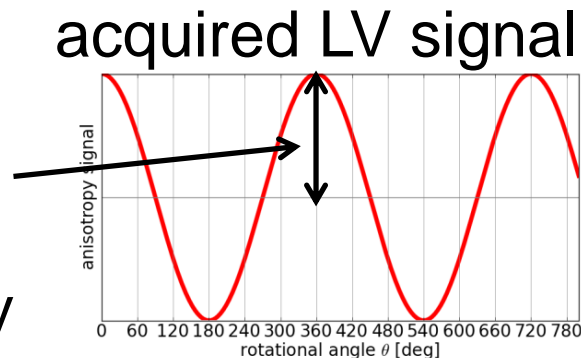


Data Analysis 3/3


- higher order LV appear at higher harmonics

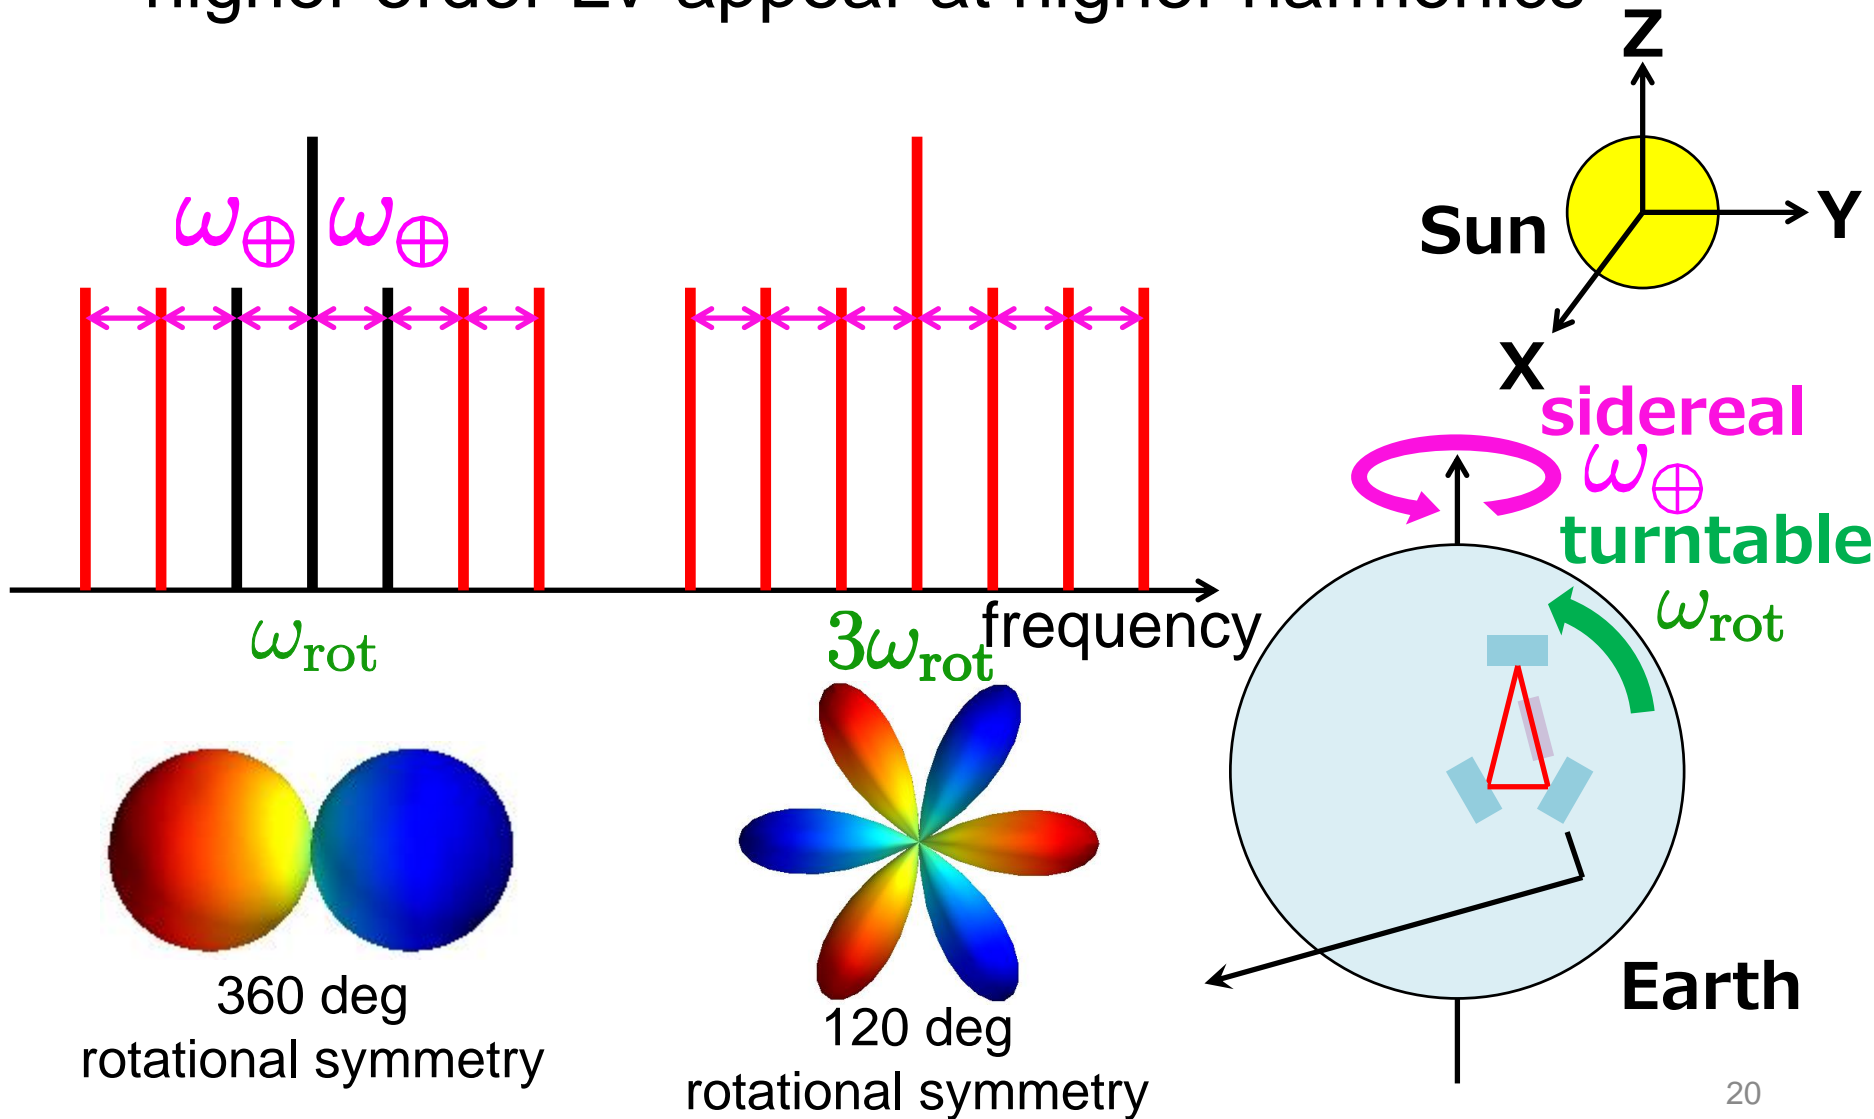


Demodulation Amps(ω_{rot})

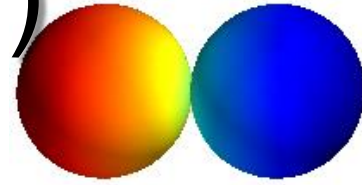


- zero consistent at 2σ
→ no significant LV can be claimed

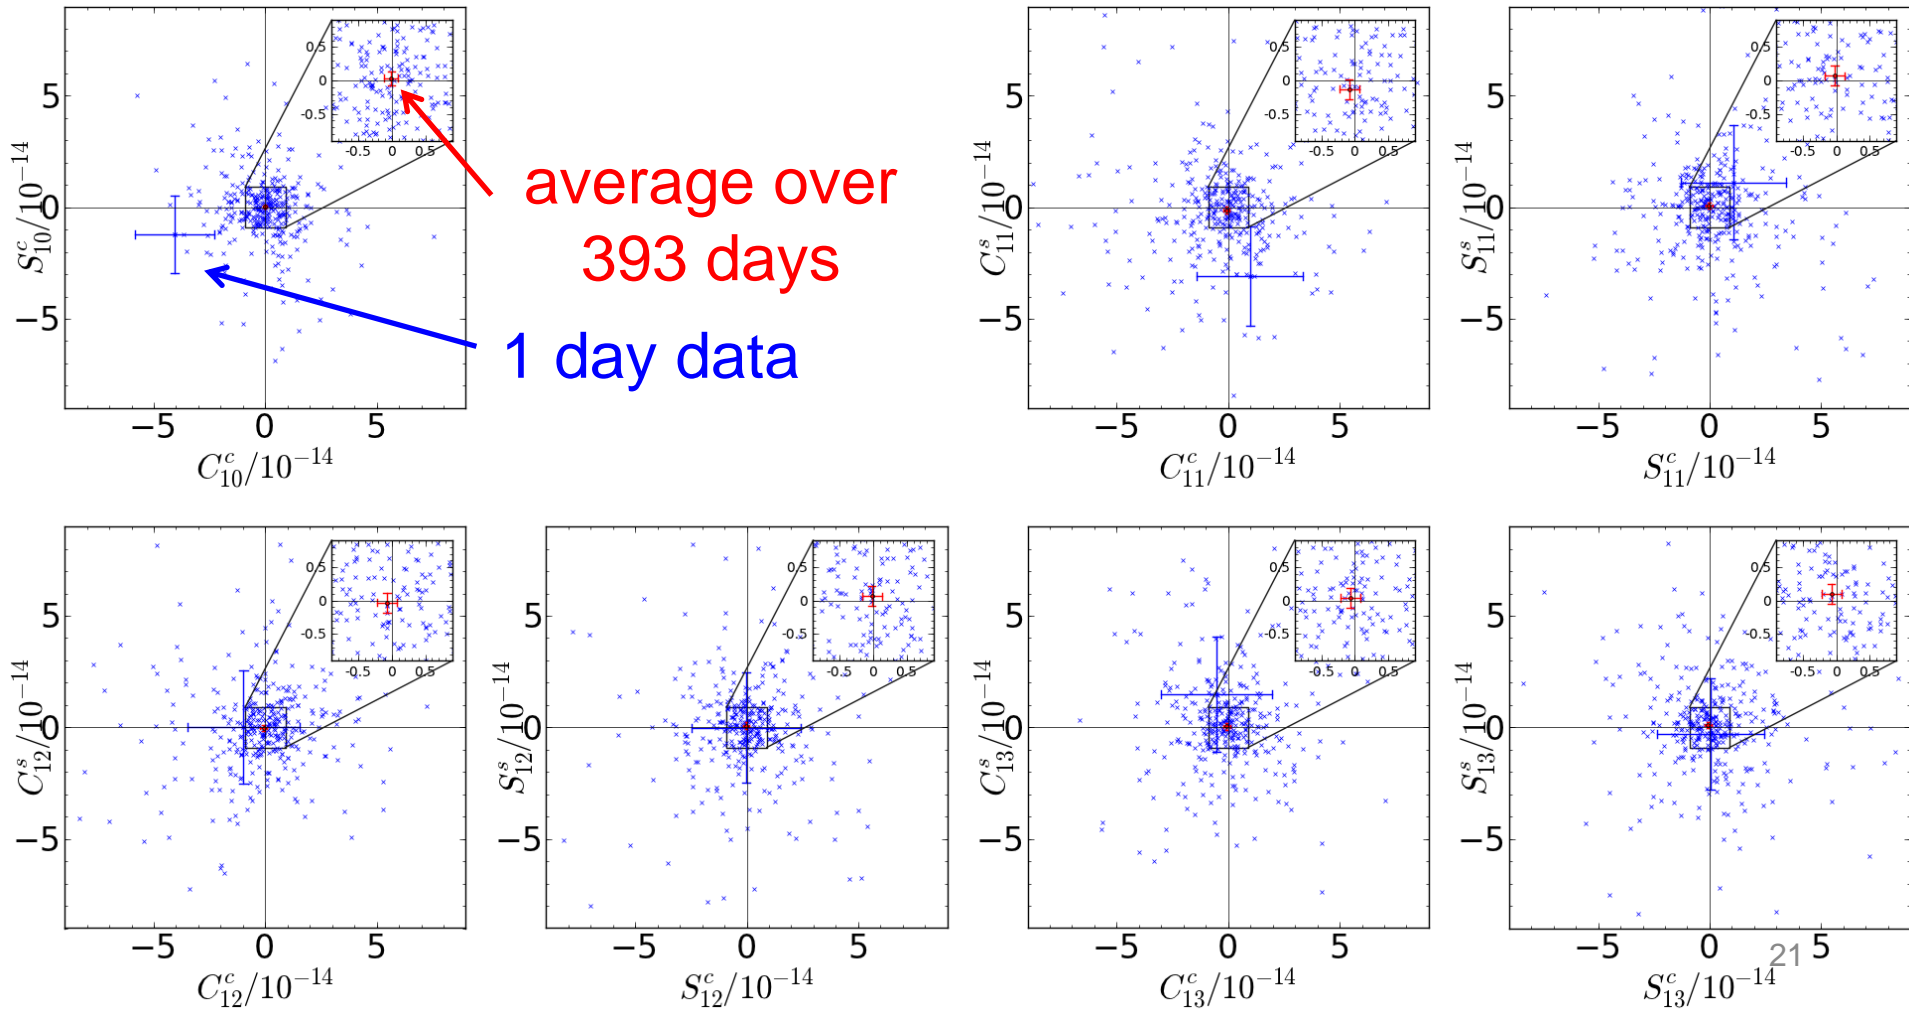

Demodulation Amps($3\omega_{\text{rot}}$)



- zero consistent at 2σ
→ no significant LV can be claimed

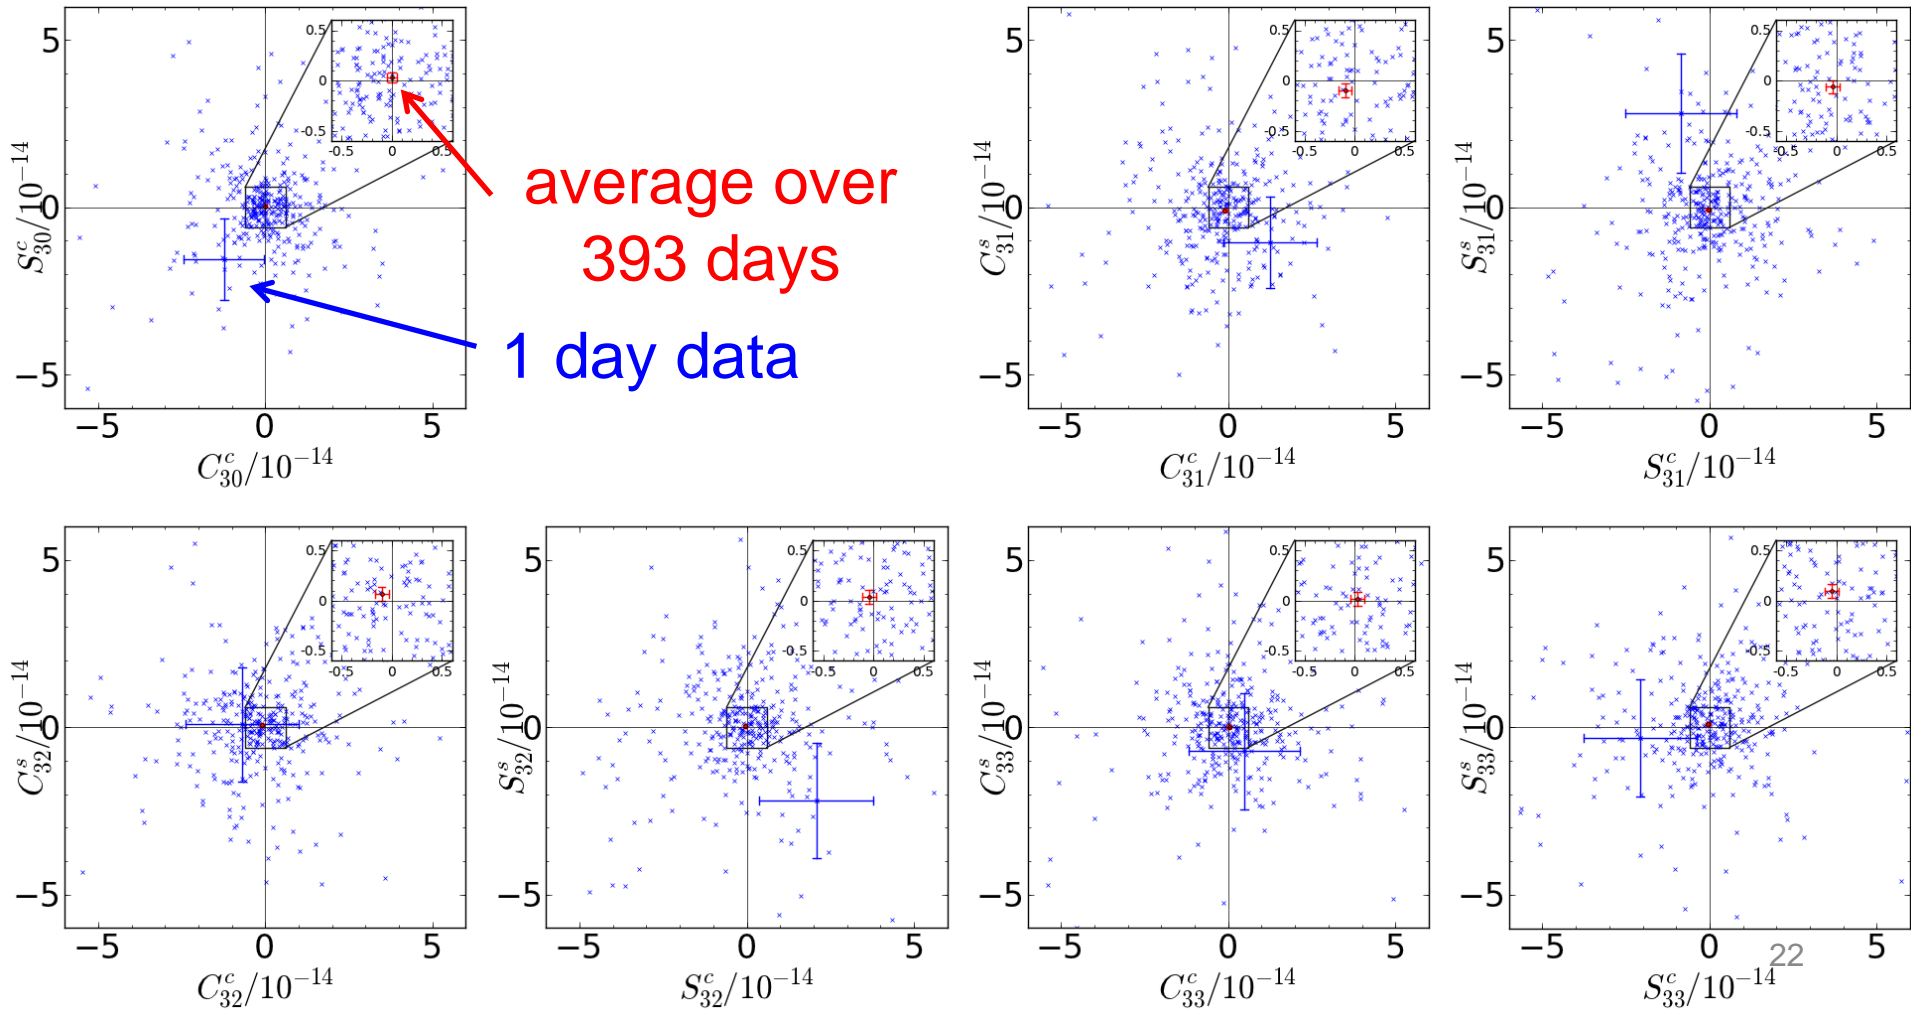

Our Limits on Anisotropy

- each demodulation amplitude is related to each anisotropy component

- limits three dipole ($l = 1$) components


$$\left| \frac{\delta c}{c} \right| \lesssim 6 \times 10^{-15}$$

more than an order of magnitude improvement

- limits on seven hexapole ($l = 3$) components

$$\left| \frac{\delta c}{c} \right| \lesssim 2 \times 10^{-15}$$

new limit

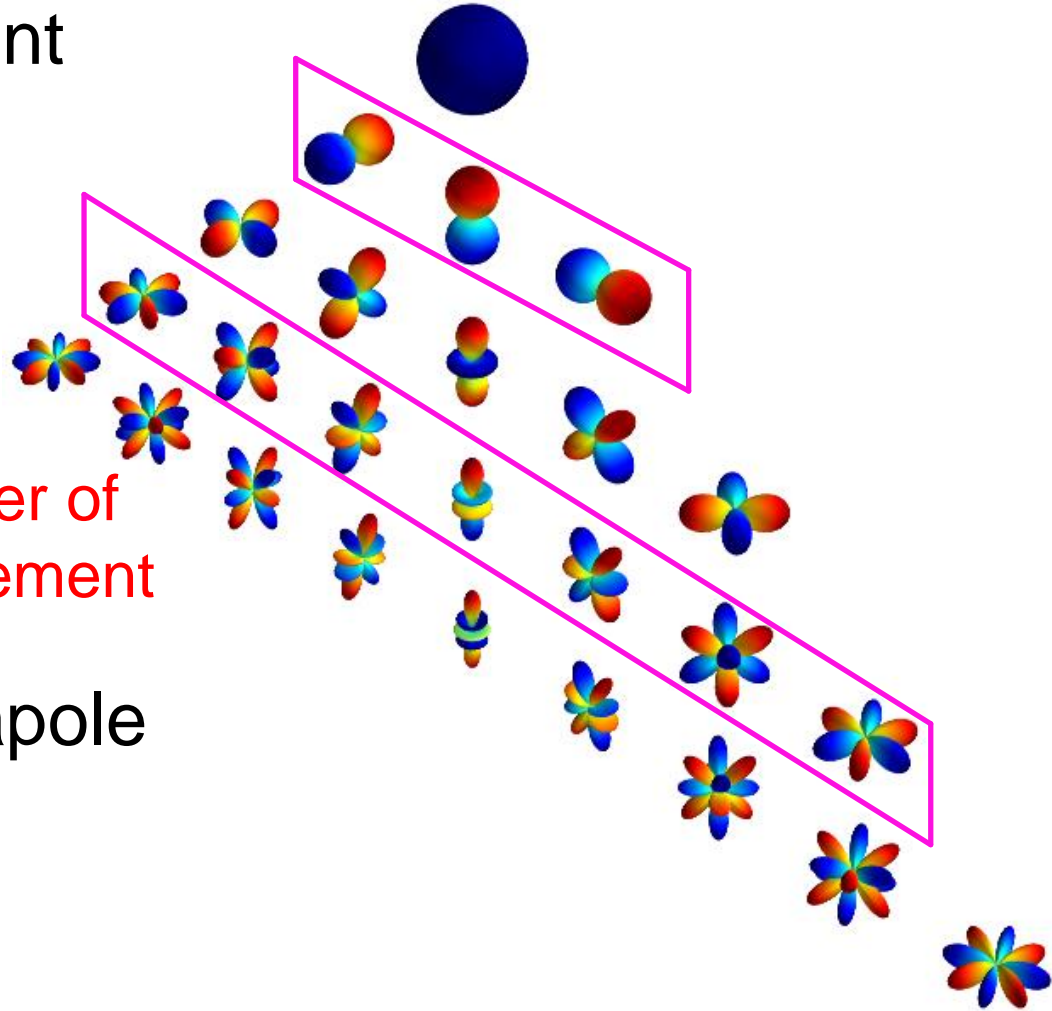

Our Limits on SME Coefficients

- Standard Model Extension (SME)
 - [D. Colladay and V. Alan Kostelecký: [PRD 58, 116002 \(1998\)](#)]
- test theory with all realistic Lorentz violation
- our result put **new limits** on “camouflage coefficients” of LV in photon sector

Dimension	Coefficient	Measurement
$d = 6$	$(\bar{c}_F^{(6)})_{110}^{(0E)}$	$(-0.1 \pm 1.5) \times 10^3 \text{ GeV}^{-2}$
	$\text{Re}[(\bar{c}_F^{(6)})_{111}^{(0E)}]$	$(-0.8 \pm 1.1) \times 10^3 \text{ GeV}^{-2}$
	$\text{Im}[(\bar{c}_F^{(6)})_{111}^{(0E)}]$	$(-0.6 \pm 1.0) \times 10^3 \text{ GeV}^{-2}$
$d = 8$	$-0.020(\bar{c}_F^{(8)})_{110}^{(0E)} + (\bar{c}_F^{(8)})_{310}^{(0E)}$	$(-0.2 \pm 1.9) \times 10^{19} \text{ GeV}^{-4}$
	$\text{Re}[-0.020(\bar{c}_F^{(8)})_{111}^{(0E)} + (\bar{c}_F^{(8)})_{311}^{(0E)}]$	$(1.4 \pm 1.3) \times 10^{19} \text{ GeV}^{-4}$
	$\text{Re}[-0.020(\bar{c}_F^{(8)})_{111}^{(0E)} + (\bar{c}_F^{(8)})_{311}^{(0E)}]$	$(0.1 \pm 1.3) \times 10^{19} \text{ GeV}^{-4}$
	$(\bar{c}_F^{(8)})_{330}^{(0E)}$	$(-0.8 \pm 3.3) \times 10^{19} \text{ GeV}^{-4}$
	$\text{Re}[(\bar{c}_F^{(8)})_{331}^{(0E)}]$	$(-0.3 \pm 1.9) \times 10^{19} \text{ GeV}^{-4}$
	$\text{Im}[(\bar{c}_F^{(8)})_{331}^{(0E)}]$	$(-2.8 \pm 1.9) \times 10^{19} \text{ GeV}^{-4}$
	$\text{Re}[(\bar{c}_F^{(8)})_{332}^{(0E)}]$	$(2.2 \pm 1.3) \times 10^{19} \text{ GeV}^{-4}$
	$\text{Im}[(\bar{c}_F^{(8)})_{332}^{(0E)}]$	$(0.2 \pm 1.3) \times 10^{19} \text{ GeV}^{-4}$
	$\text{Re}[(\bar{c}_F^{(8)})_{333}^{(0E)}]$	$(-0.1 \pm 1.6) \times 10^{19} \text{ GeV}^{-4}$
	$\text{Im}[(\bar{c}_F^{(8)})_{333}^{(0E)}]$	$(-0.1 \pm 1.6) \times 10^{19} \text{ GeV}^{-4}$



limits on LV of
dimension 6
 10^3 GeV^{-2}

limits on LV of
dimension 8
 10^{19} GeV^{-4}

Upgrade of the Apparatus


- current noise level is limited by noise from rotation

- semi-monolithic optical bench to reduce vibration sensitivity

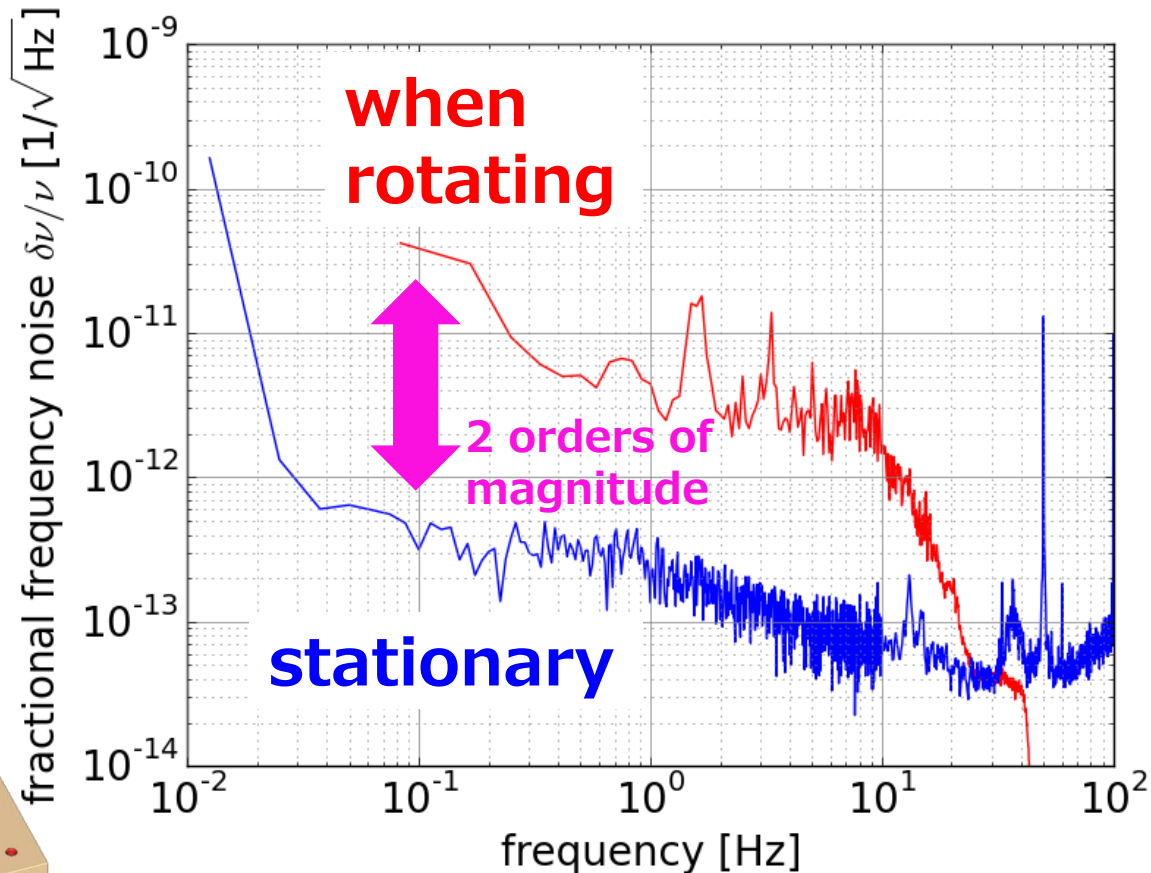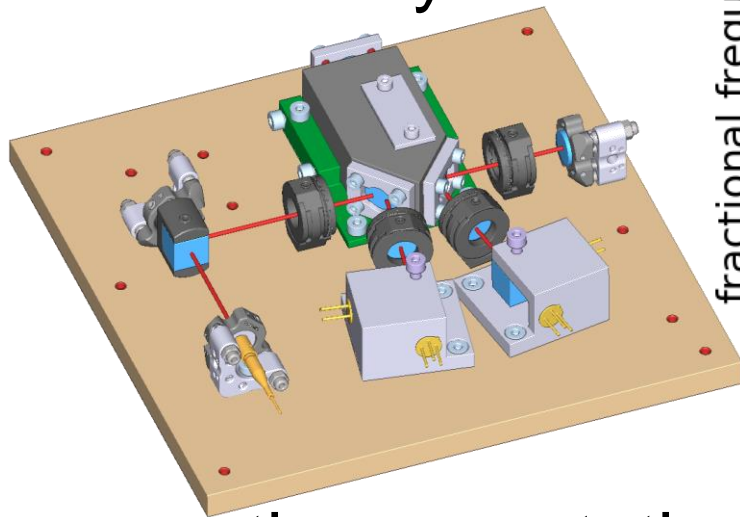


- continuous rotation for more stable operation

Apparatus Comparison

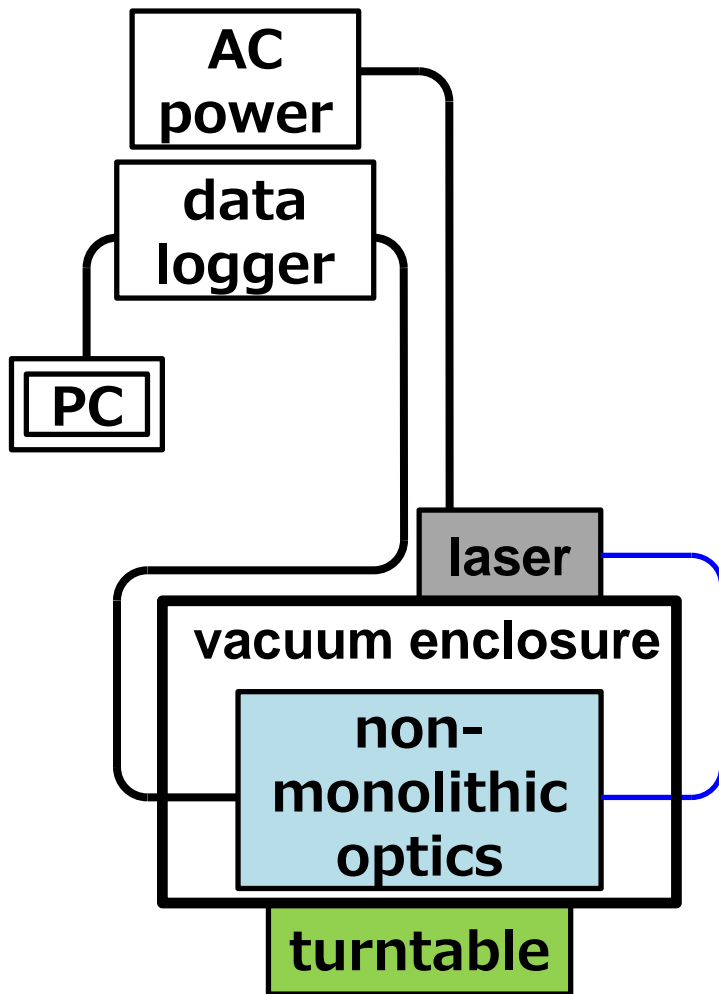

Previous Model


- non-monolithic optics
- alternative rotation

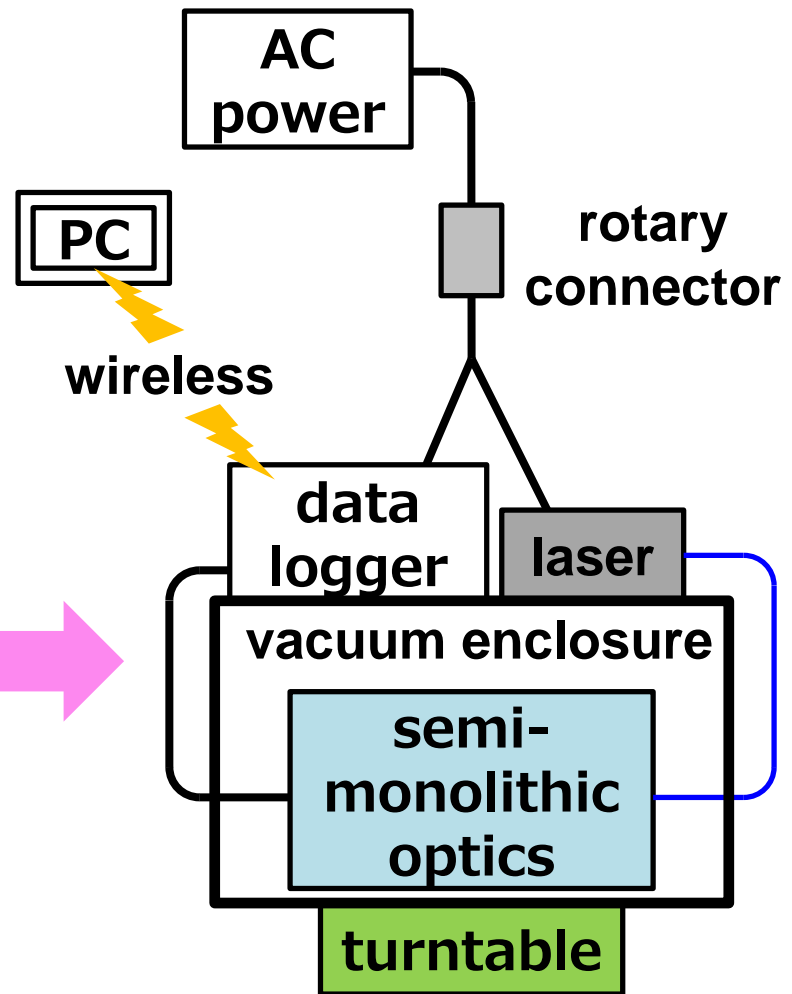

New Model



- semi-monolithic optics
- continuous rotation

Apparatus Comparison

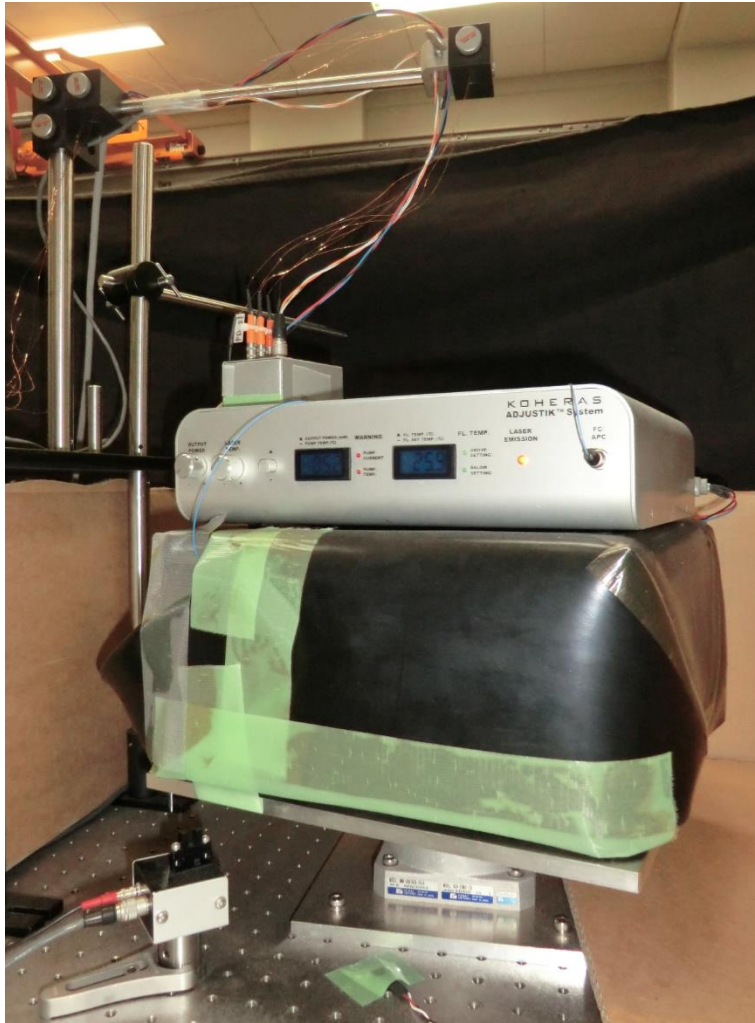

Previous Model

- non-monolithic optics
- alternative rotation

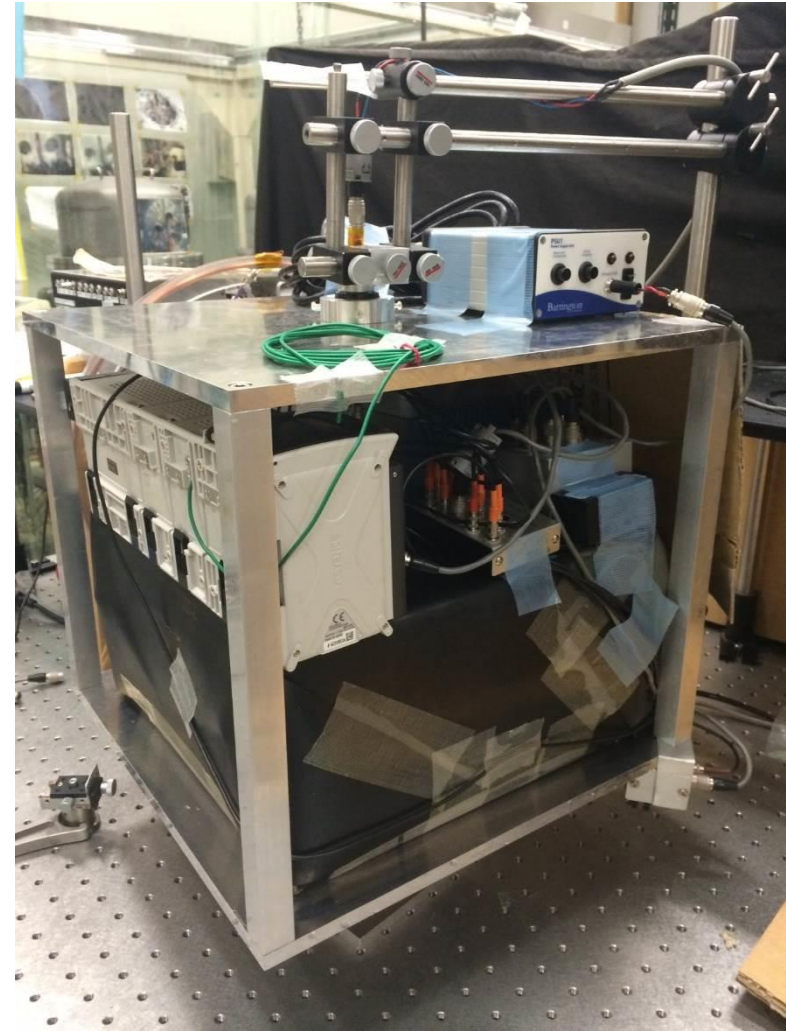


New Model


- semi-monolithic optics
- continuous rotation

Continuous Rotation System

rotary connector

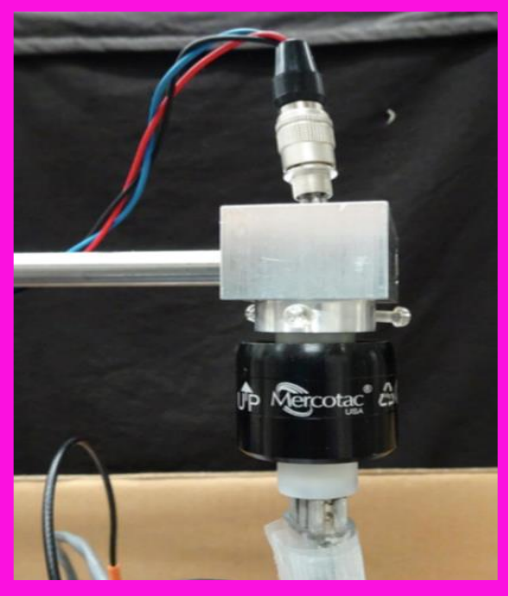

wireless data logger


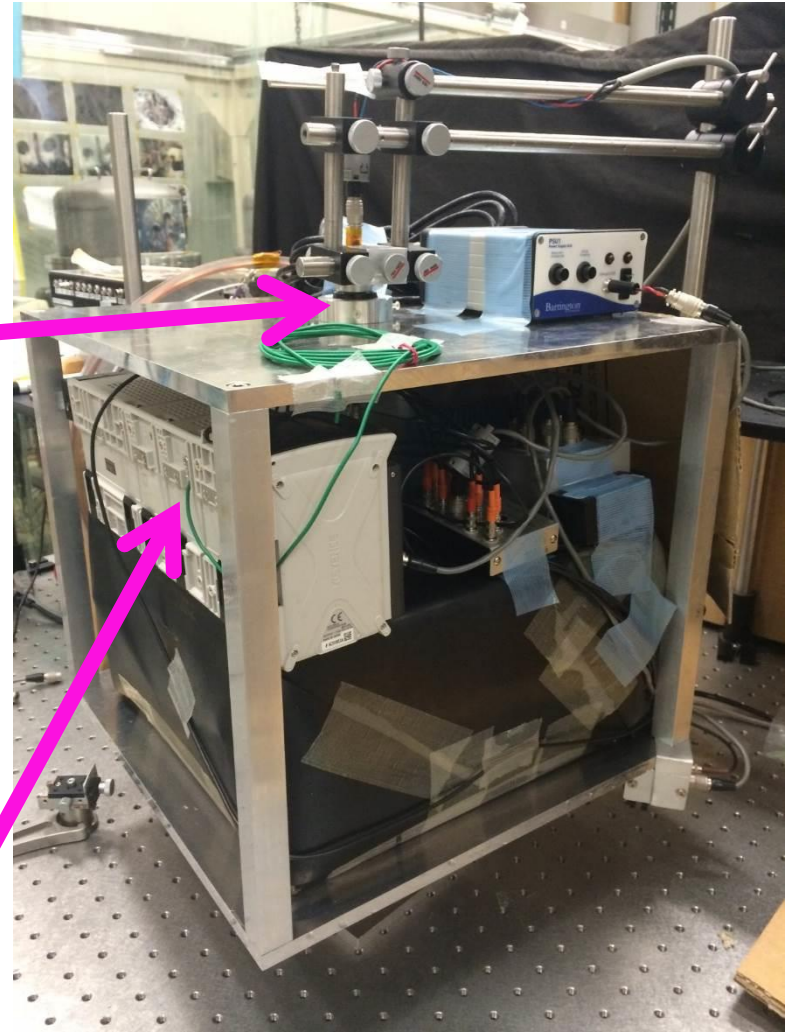


New Model

- semi-monolithic optics
- continuous rotation


Magnetic Noise

- environmental magnetic field noise couple into electronics noise
- can be subtracted by magnetic field measurement

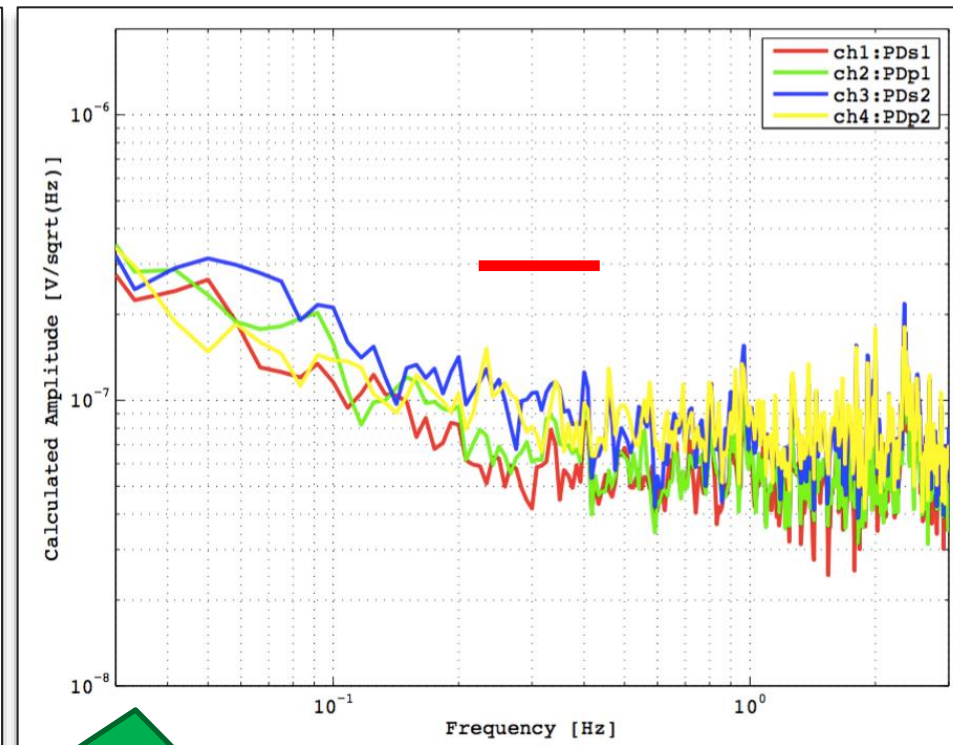
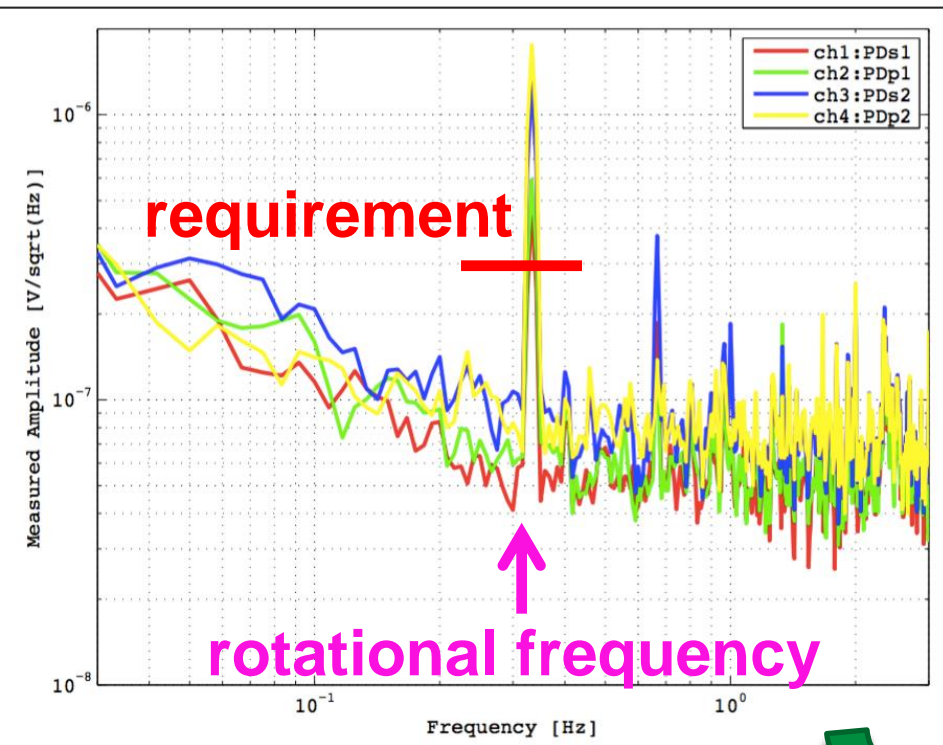


magnetic field noise subtraction



Optics Comparison

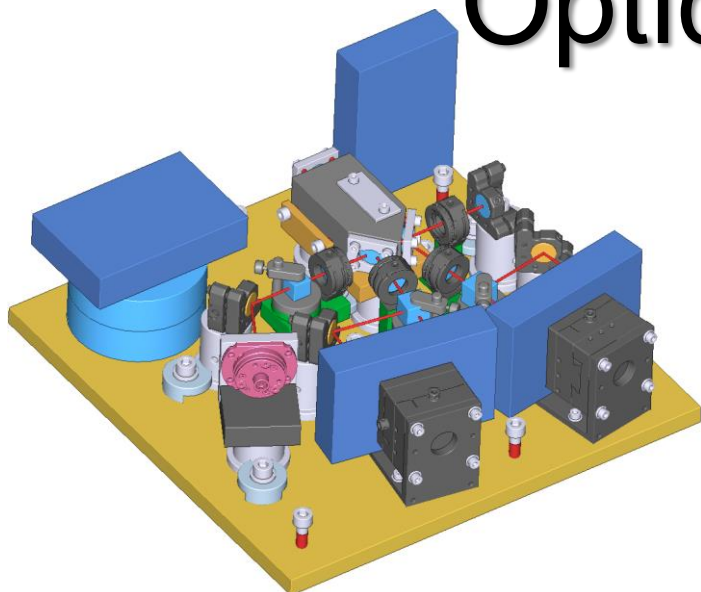

reduced beam height
simplified electronics

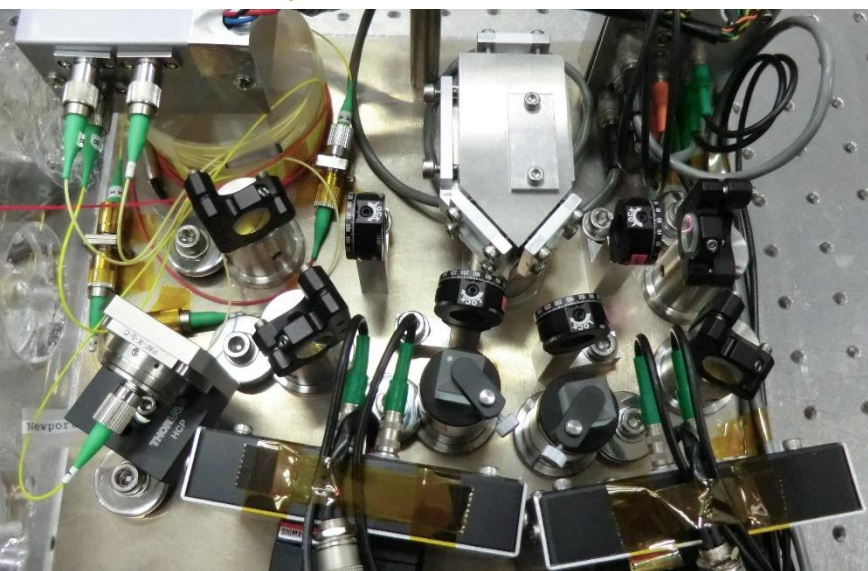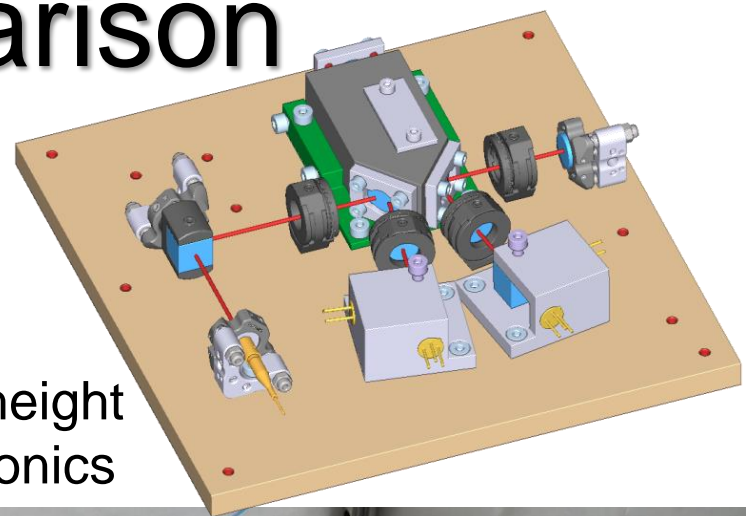


Previous Model
- non-monolithic optics

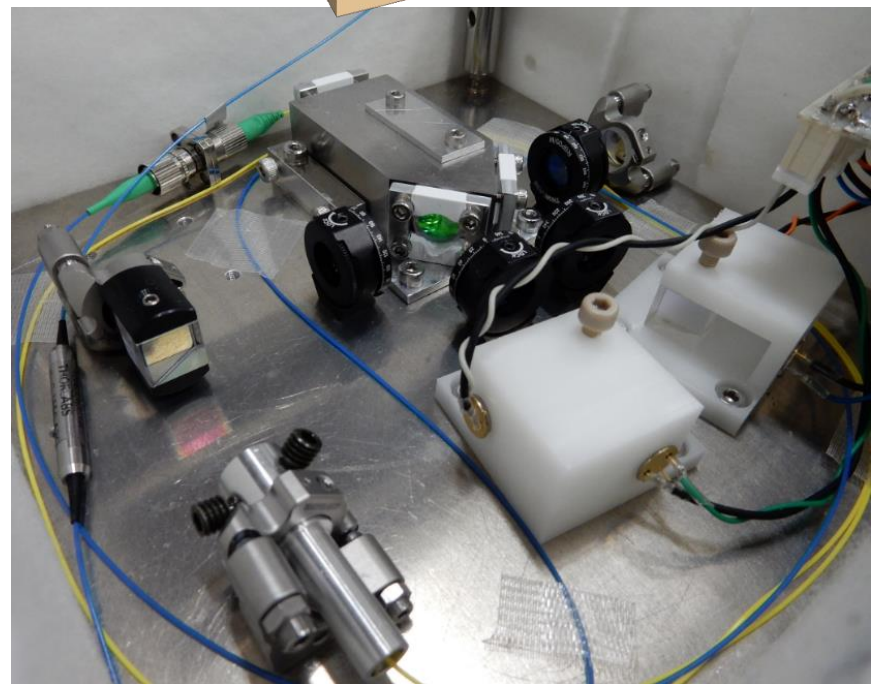


New Model
- semi-monolithic optics³⁰

Optics Comparison

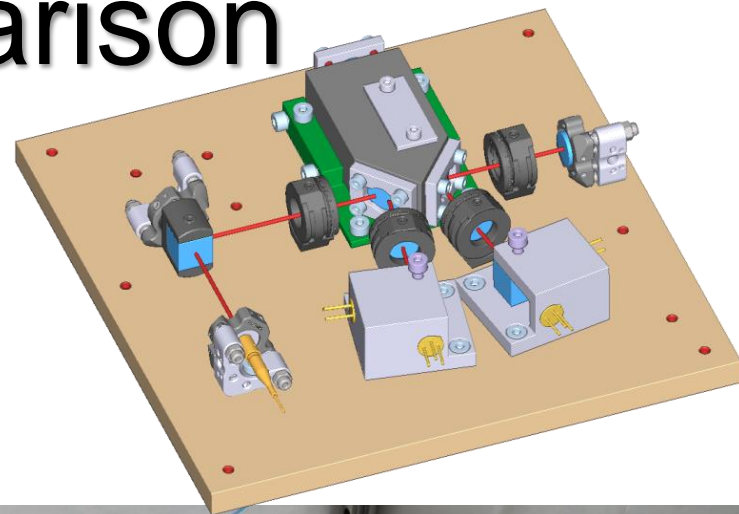

preliminary noise measurement
noise analysis ongoing

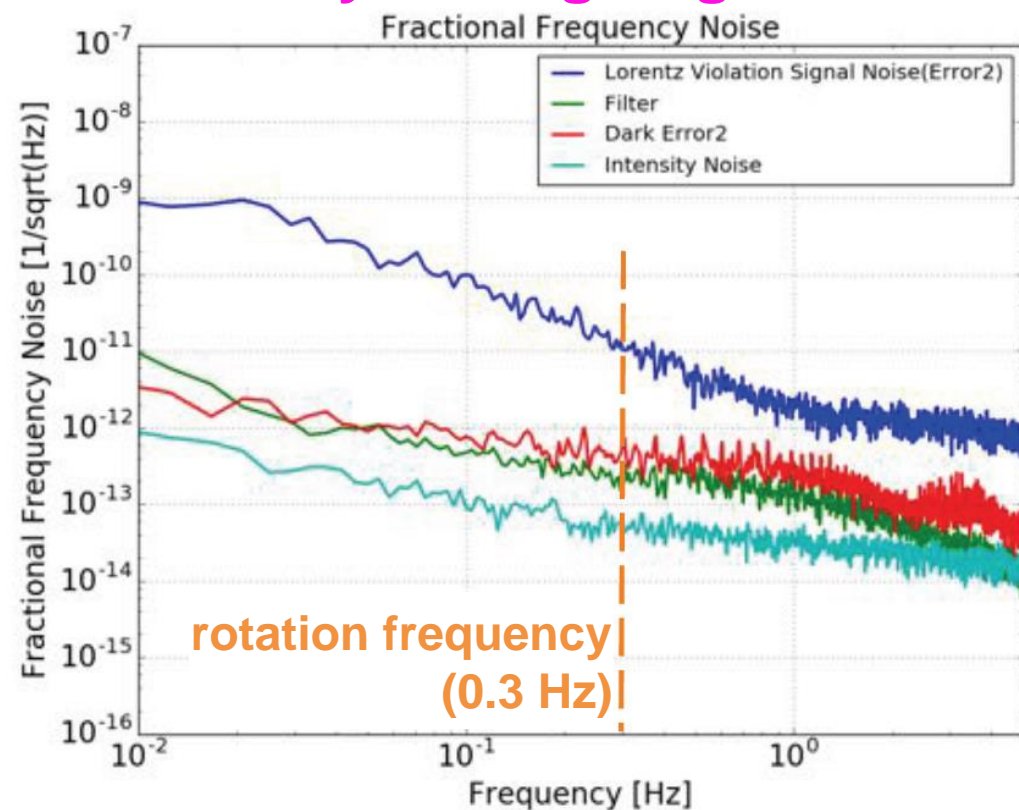

New Model

- semi-monolithic optics³¹


Summary and Outlook

Summary

- compared the speed of light propagating in opposite directions
- using a double-pass optical ring cavity
- new limits on higher order LV in photons

Outlook

- currently upgrading the apparatus
(Y. Sakai and H. Takeda)
- semi-monolithic optics
- continuous rotation

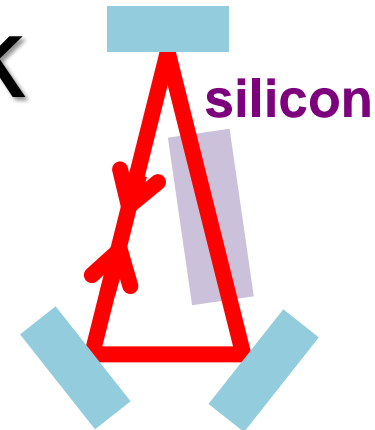

Additional Slides

Higher Order Lorentz Violation

- Standard Model Extension
- add LV term in Lagrangian for electromagnetic field
- $\hat{k}_F^{(d)}$ is zero for non-LV, d is mass dimension


full SME with HOLV

$$\mathcal{L} = -\frac{1}{4}F_{\mu\nu}F^{\mu\nu} + \frac{1}{4}F_{\kappa\lambda}(\hat{k}_F^{(4)})^{\kappa\lambda\mu\nu}F_{\mu\nu} + \frac{1}{4}F_{\kappa\lambda}(\hat{k}_F^{(6)})^{\kappa\lambda\mu\nu}F_{\mu\nu} + \frac{1}{4}F_{\kappa\lambda}(\hat{k}_F^{(8)})^{\kappa\lambda\mu\nu}F_{\mu\nu}.$$

	4 th order LV	6 th order LV	8 th order LV
	↑	↑	↑
	d=4	d=6	d=8
	no dimension	+2 nd order differential	+4 th order differential
		M ⁻² dimension	M ⁻⁴ dimension


Higher Order LV and Anisotropy

- HOLV gives multipole anisotropy

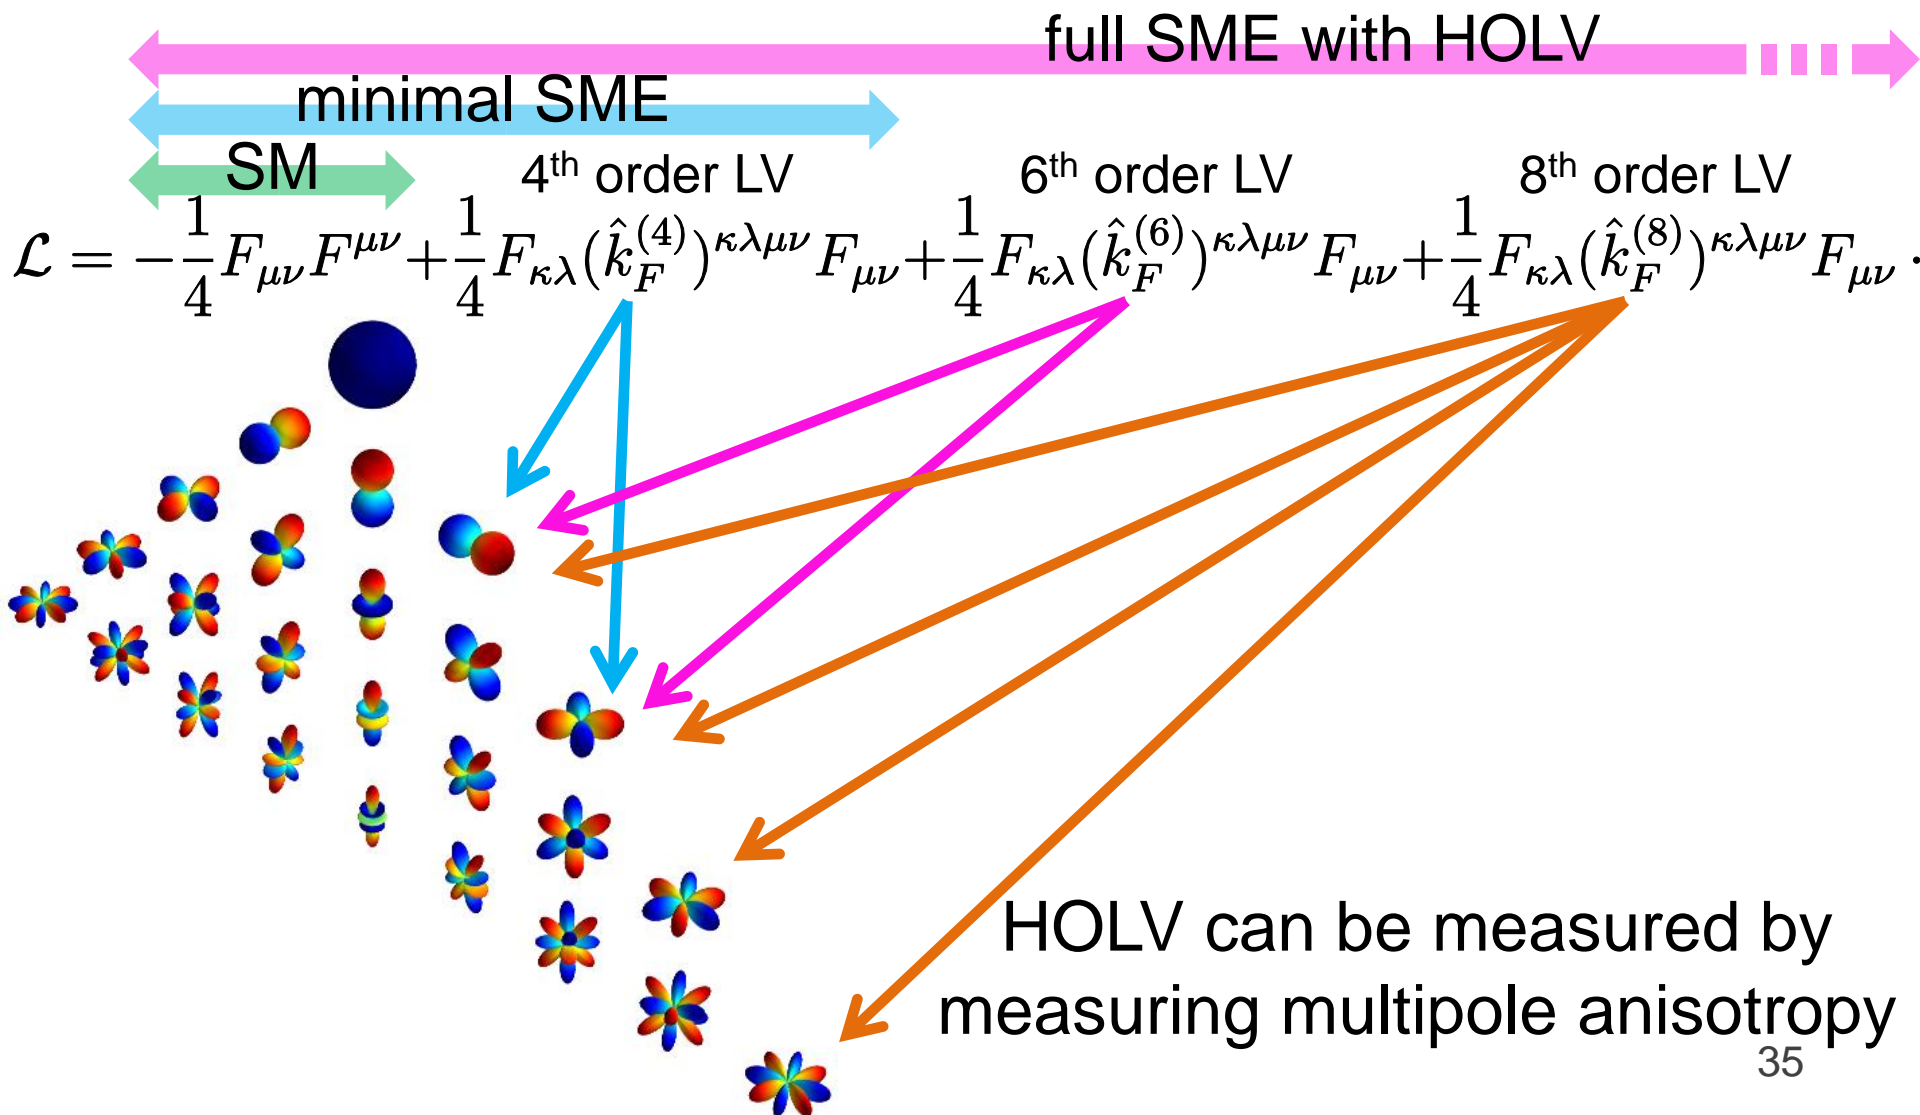


Systematic Errors

- 10% of statistical error at maximum

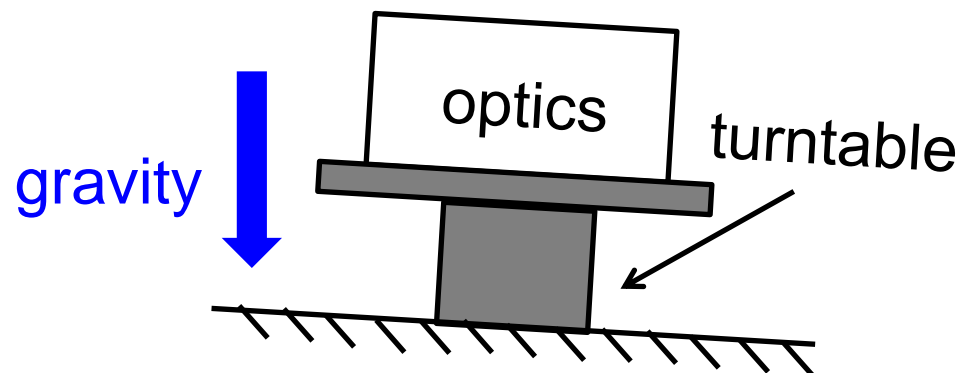


Cause	Amount	Ratio	
Sagnac effect	< 1mrad/sec	<2%	} offset
turntable tilt	< 0.2 mrad	<10%	
detuning	-	3%	} calibration
TF meas.	-	3%	
laser frequency actuation meas.	12.9±0.6 MHz/V	5%	
refractive index	3.69±0.01	0.4%	
cavity length	192±1 mm	0.5%	

Some Photos

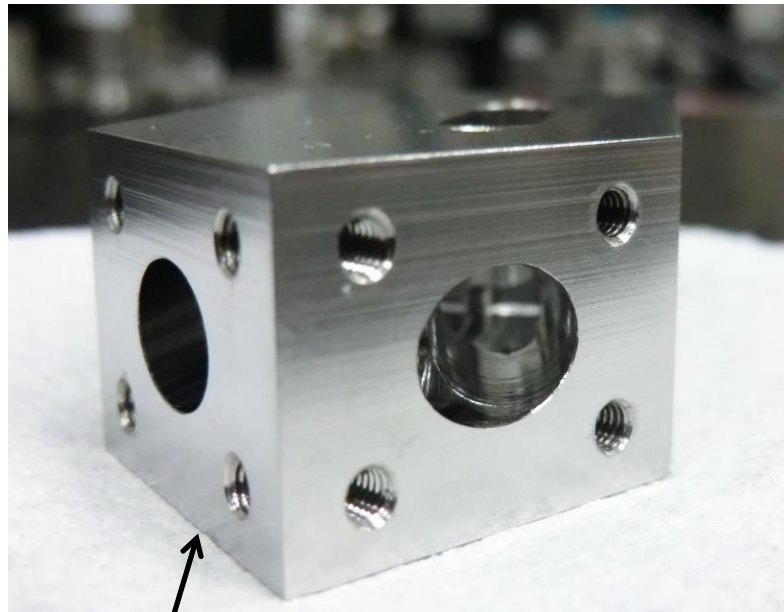


spacer made of
Super Invar

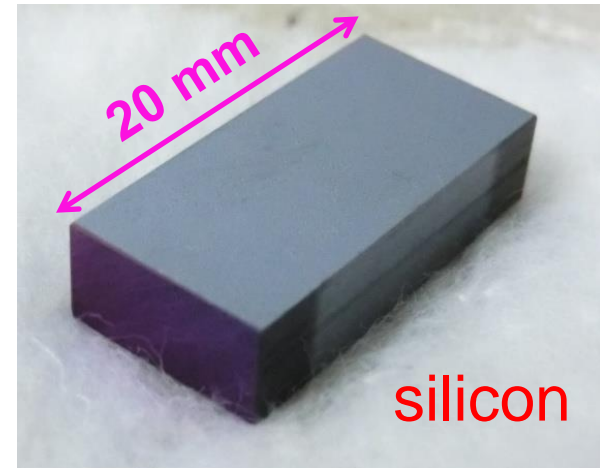

silicon inside

silicon

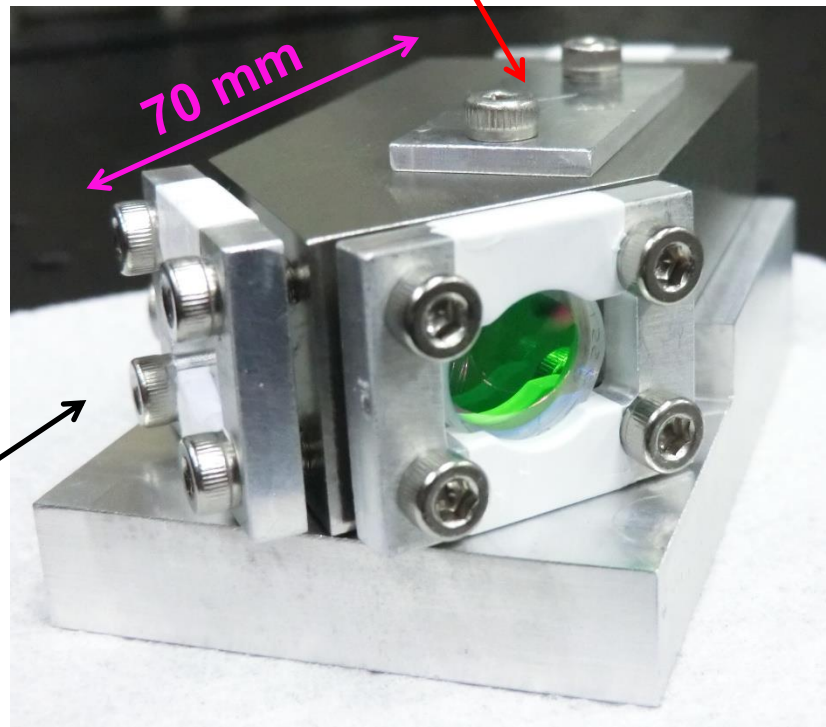

cavity mirrors

Cheat Sheet

- rotation frequency $f_{\text{rot}} = 0.083$ Hz
($T_{\text{rot}} = 12$ sec)
- wavelength $\lambda = 1550$ nm
- laser frequency $\nu = 1.9e14$ Hz
- input power $P_0 = 1$ mW
- finesse $F = 120$
- cavity length $L = 140$ mm
- silicon length $d = 20$ mm
- silicon refractive index $n = 3.69$
- silicon $dn/dT = 2e-4$ /K
- silicon thermal expansion = $3e-6$ /K
- Super Invar thermal exp. = $\sim 1e-7$ /K
- silicon AR loss $l < 0.5$ % / surface
- incident angle $\theta = 9.5$ deg
- FSR = 1.5 GHz
- FWHM = 12 MHz
- current sensitivity $\sim 6e-13$ /rtHz
($\sim 4e-11$ /rtHz when rotated)
- shot noise $\sim 6e-16$ /rtHz
- thermal noise $\sim 8e-16$ /rtHz
(all @ 0.1 Hz)
- Sun speed in CMBR = 369 km/s
- orbital speed of Earth = 30 km/s
- rotational speed of Earth = 0.4 km/s
- History
 - Jul 2011: idea
 - Nov 2011: first run (10hour)
 - Jul 2012: data taking started
 - Oct 2012: continuous data taking
 - Oct 2013: shut down
- cost $< \sim 200$ 万円